


## HDR &amp; WHDR Series

WHDR (Pearlescent dark gray) Wheel Diameter x Wheel Width 100x 31mm

A

KS-1202500413W673

Easy to Floor Surface Preservation, Non-Markings, Easy To Maneuver, and can withstand heavy loads.  
 Low rolling and Swivel Resistance, resistant to corrosion from many corrosive substances.  
 Color: Pearlescent dark gray, includes bearing and Dust Cap.

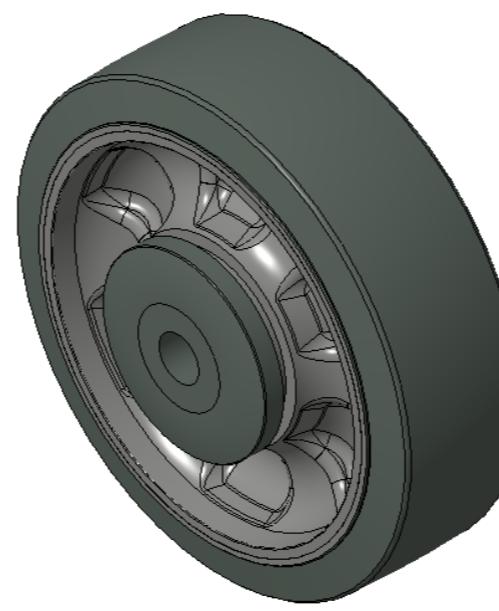

Wheel Center: High-quality impact-resistant polypropylene  
 Outer packaging: Thermoplastic rubber elastomer (TPR)  
 Bearing: Ball bearing

Drawings are for reference only and may differ from the product

Picture may differ from original product

## Technical Data


 Imperial  Metric

Wheel Diameter(D)	4 "
Wheel Width(T2)	1-1/4 "
Wheel Bearing	Ball Bearing
Axle Bore(d)	3/8 "
Axle Bore(S)	—
Bearing Bore Depth(t)	—
Hub Length(T1)	1-11/16 "
Hardness Of Tread	95±5° Shore A
Load Capacity (Dynamic)	353lbs
Load Capacity (Static)	529lbs
Temperature	-4°F to +140°F
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.7lbs
Standard	ISO22883

## Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • ○ ○
Floor Surface Preservation	• • • ○ ○

## 2D Dimensional Drawing of Single Wheel

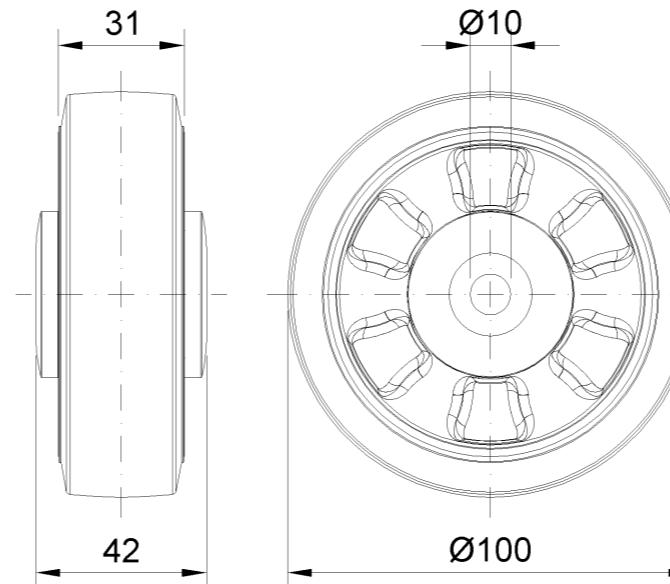

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com