

HDR & WHDR Series

HDR Elastic Wheel (Black-Blue) Wheel Diameter x Wheel Width 100x34mm

EAN

KS-12025004153173

Easy to Floor Surface Preservation, Non-Markings, Easy To Maneuver, and can withstand heavy loads.
 Low rolling and Swivel Resistance, resistant to corrosion from many corrosive substances.
 Color: Black/Blue, includes bearing and Dust Cap.



Wheel core: High-quality impact-resistant polypropylene
 Wheel tread: Thermoplastic rubber elastomer (TPR)
 Bearing: Precision ball bearing

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data


 Metric Imperial

Wheel Diameter(D)	100mm
Wheel Width(T2)	34mm
Wheel Bearing	Ball Bearing
Axle Bore(d)	10mm
Axle Bore(S)	—
Bearing Bore Depth(t)	—
Hub Length(T1)	42mm
Hardness Of Tread	72±5° Shore A
Load Capacity (Dynamic)	180kgs
Load Capacity (Static)	270kgs
Temperature	-20°C to +60°C
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.23kgs
Standard	ISO22883

Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • •
Floor Surface Preservation	• • • •

2D Dimensional Drawing of Single Wheel

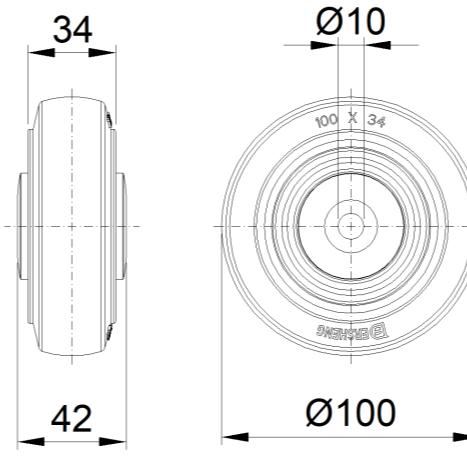

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com