


HDR & WHDR Series

HDR Wheel (Gray Light Gray Arc) Wheel Diameter×Wheel Width 100×50mm

EAN

KS-12025004208100

Easy to Floor Surface Preservation, Non-Markings, Easy To Maneuver, and can withstand heavy loads.
 Low rolling and Swivel Resistance, resistant to corrosion from many corrosive substances.
 Color: Light gray

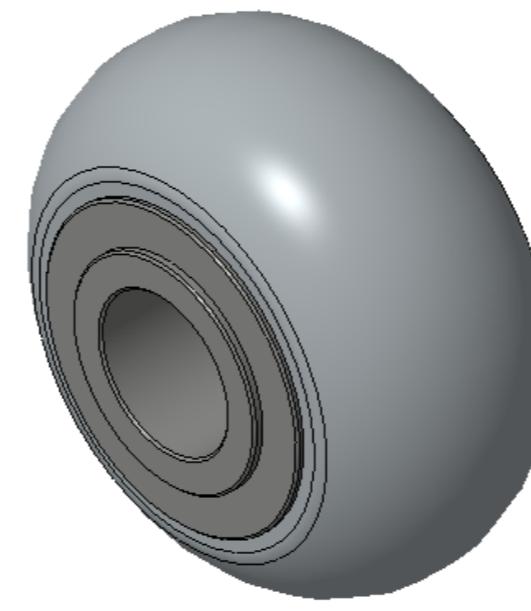

Wheel core: High-quality impact-resistant polypropylene
 Wheel tread: Thermoplastic rubber elastomer (TPR)
 Bearings: —

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data

 Metric Imperial

Wheel Diameter(D) 100mm

Wheel Width(T2) 50mm

Wheel Bearing Without Bearing

Axe Bore(d) —

Axe Bore(S) 30.2mm

Bearing Bore Depth(t) —

Hub Lenth(T1) 56mm

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 136kgs

Load Capacity (Static) 204kgs

Temperature -20°C to +60°C

Electrical Conductivity N/A

Anti-Static N/A


Weight 0.29kgs

Standard ISO22883

Advantages at a glance

Rolling Resistance	● ● ● ● ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ●

2D Dimensional Drawing of Single Wheel

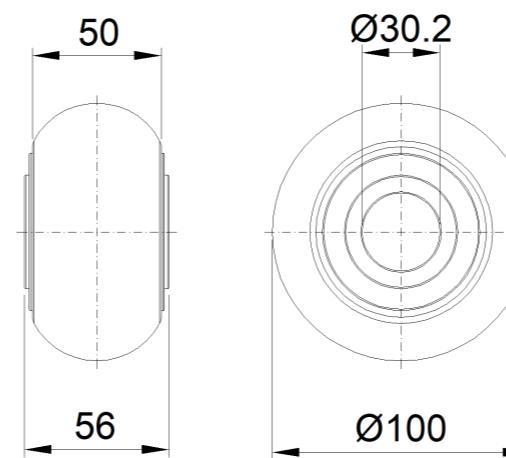

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com