


HDR & WHDR Series

WHDR (pearl light gray) Wheel Diameter x Wheel Width 125 x 50mm

EAN

KS-1202500520W175

Easy to Floor Surface Preservation, Non-Markings, Easy To Maneuver, and can withstand heavy loads.
 Low rolling and Swivel Resistance, resistant to corrosion from many corrosive substances.
 Color: Pearlescent dark gray, with Telling bearing.

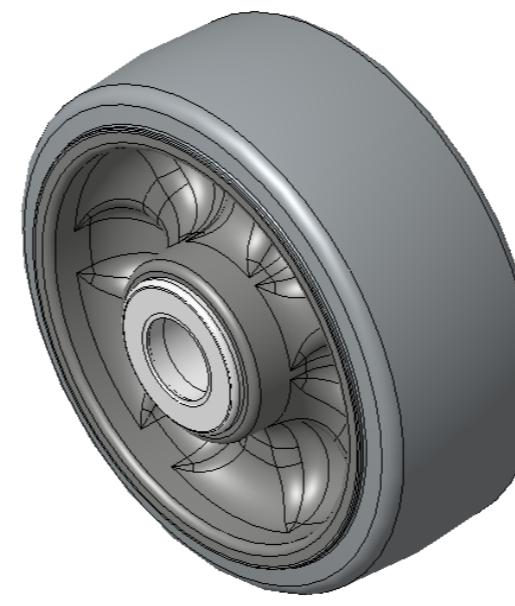

Wheel Tread: High-quality impact-resistant polypropylene
 Outer packaging: Thermoplastic rubber elastomer (TPR)
 Bearings: Telling Bearings

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data

 Metric Imperial

Wheel Diameter(D) 125mm

Wheel Width(T2) 50mm

Wheel Bearing Without Bearing

Axe Bore(d) 13mm

Axe Bore(S) —

Bearing Bore Depth(t) —

Hub Lenth(T1) 61mm

Hardness Of Tread 95±5° Shore A

Load Capacity (Dynamic) 340kgs

Load Capacity (Static) 510kgs

Temperature -20°C to +60°C

Electrical Conductivity N/A

Anti-Static N/A


Weight 0.27kgs

Standard ISO22883

Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • ○ ○
Floor Surface Preservation	• • • ○ ○

2D Dimensional Drawing of Single Wheel

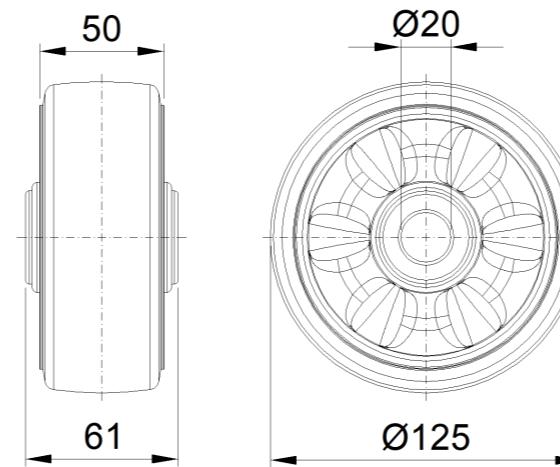

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com