


## HDR &amp; WHDR Series

WHDR (pearl light gray) Wheel Diameter x Wheel Width 125 x 50mm

EAN

KS-1202500520W177

Easy to Floor Surface Preservation, Non-Markings, Easy To Maneuver, and can withstand heavy loads.  
 Low rolling and Swivel Resistance, resistant to corrosion from many corrosive substances.  
 Color: Pearlescent dark gray, includes bearing and pad.

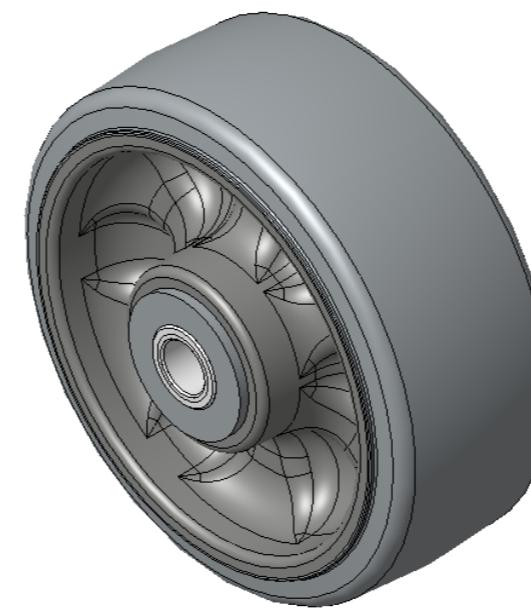

Wheel Tread: High-quality impact-resistant polypropylene  
 Outer packaging: Thermoplastic rubber elastomer (TPR)  
 Bearing: Precision ball bearing

Drawings are for reference only and may differ from the product

Picture may differ from original product

## Technical Data

 Metric  Imperial

Wheel Diameter(D) 125mm

Wheel Width(T2) 50mm

Wheel Bearing Ball Bearing

Axe Bore(d) 13mm

Axe Bore(S) —

Bearing Bore Depth(t) —

Hub Lenth(T1) 62mm

Hardness Of Tread 95±5° Shore A

Load Capacity (Dynamic) 340kgs

Load Capacity (Static) 510kgs

Temperature -20°C to +60°C

Electrical Conductivity N/A

Anti-Static N/A


Weight 0.27kgs

Standard ISO22883

## Advantages at a glance

Rolling Resistance	● ● ● ●
Operating Noise	● ● ● ○ ○
Floor Surface Preservation	● ● ● ○ ○

## 2D Dimensional Drawing of Single Wheel

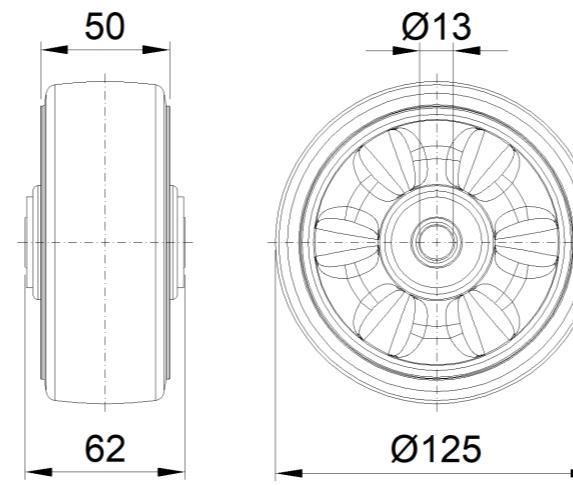

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com