


HDR & WHDR Series

WHDR Wheel (Black-Dark Gray) Wheel Diameter x Wheel Width 150 x 38mm

A

KS-1202500615W700

Easy to Floor Surface Preservation, Non-Markings, Easy To Maneuver, and can withstand heavy loads.
 Low rolling and Swivel Resistance, resistant to corrosion from many corrosive substances.
 Color: Dark black/dark gray

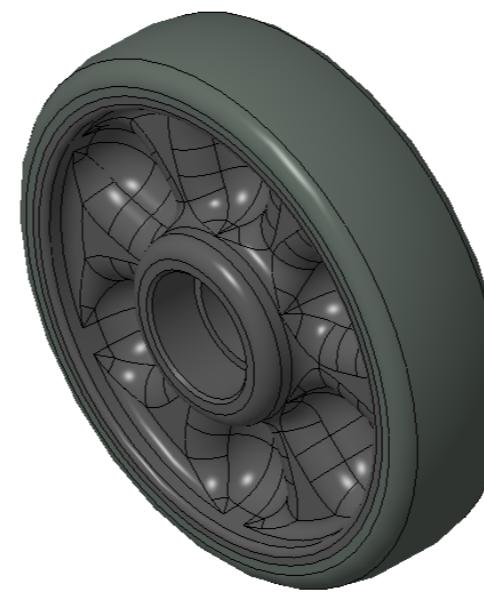

Wheel Center: High-quality impact-resistant polypropylene
 Outer packaging: Thermoplastic rubber elastomer (TPR)
 Bearing: No bearing

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data

 Metric Imperial

Wheel Diameter(D) 150mm

Wheel Width(T2) 38mm

Wheel Bearing Without Bearing

Axe Bore(d) —

Axe Bore(S) 35mm

Bearing Bore Depth(t) —

Hub Lenth(T1) 45mm

Hardness Of Tread 95±5° Shore A

Load Capacity (Dynamic) 304kgs

Load Capacity (Static) 456kgs

Temperature -20°C to +60°C

Electrical Conductivity N/A

Anti-Static N/A


Weight 0.45kgs

Standard ISO22883

Advantages at a glance

| | |
|----------------------------|-----------|
| Rolling Resistance | • • • • |
| Operating Noise | • • • ○ ○ |
| Floor Surface Preservation | • • • ○ ○ |

2D Dimensional Drawing of Single Wheel

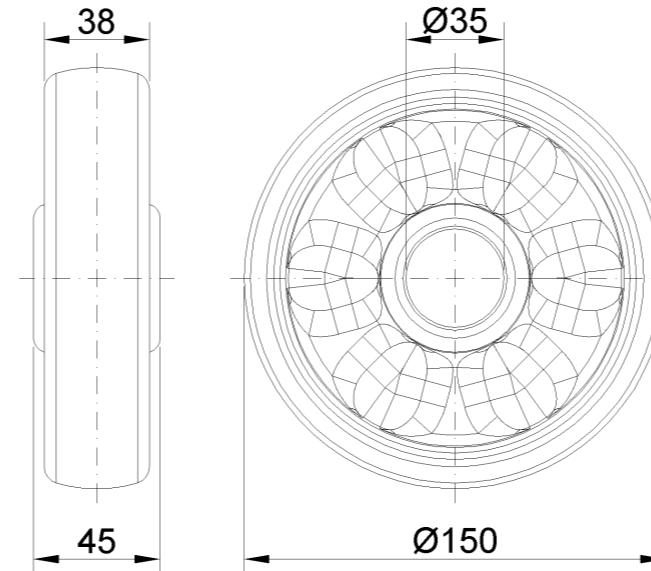

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com