1112 2" Wide General Purposes Caster Series

AQPU (brown) Wheel Diameter × Wheel Width 150 x 42mm


EAN

TW-111206004A006

Casters with front brake and With locking system. Welded Caster Fork Zine-Plated, Mounting Type - Top Plate Aluminum wheel center, High Quality Polyurethane Wheel Tread Brown color, Bearing—Ball Bearings

Wheel tread: high quality polyurethane Wheel Center: aluminum core

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 6 "

Wheel Width 1-11/16"

Wheel Bearing Wheels With Ball Bearings

4-9/16 " x 4 " Plate Size **Bolt Hole Spacing** 3-3/8 " x 2-3/4 " 13/16 " x 3/8 " Plate Hole Offset 1-7/16 " 12-3/8 " Swivel Interference 7-1/2 " Overall Height 6-1/8 " Swivel Radius Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 992lbs

Load Capacity (Static) 1488lbs

Temperature -4°F to +158°F

Fork Type Swivel Caster With Front Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 5.3lbs

Standard ISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

Dimensions

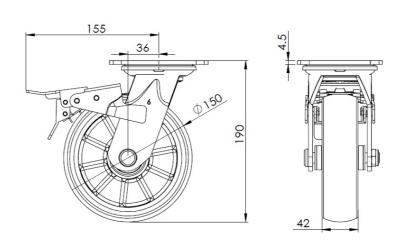

Mounting

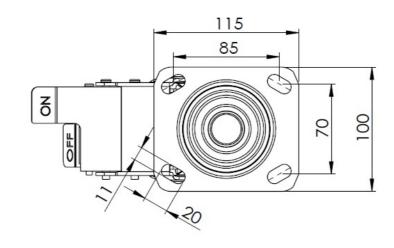

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.