

1153 Heavy Duty 2" Wide General Purposes Caster Series



PPR Wheel Diameter x Wheel Width 75 x 25 mm


EAN

TW-111 KS-111
YJ-111 VN-111

Swivel Caster with Riveted Fork and Stamping Fork.
Zinc-Plated, Mounting Type - Top Plate.
Reinforced Polypropylene Wheel Center and Wheel Tread.
Bearings—Ball Bearings.

Wheel surface: Thermoplastic (PA6)
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

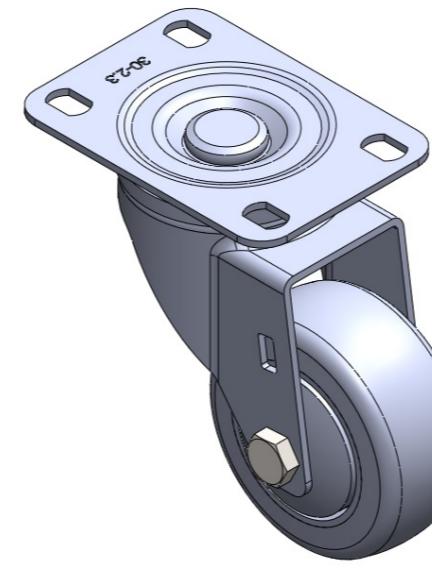

Picture may differ from original product

Technical Data


Metric Imperial

Wheel Diameter	150mm
Wheel Width	40mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	100 x 100mm
Bolt Hole Spacing	75 x 45mm
Plate Hole	119mm
Offset	100mm
Swivel Interference	100mm
Overall Height	200mm
Swivel Radius	100mm
Hardness Of Tread	75±5° Shore D
Load Capacity (Dynamic)	500kgs
Load Capacity (Static)	500kgs
Temperature	-20°C to +80°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.50kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • o o o
Floor Surface Preservation	• • o o o

Dimensions

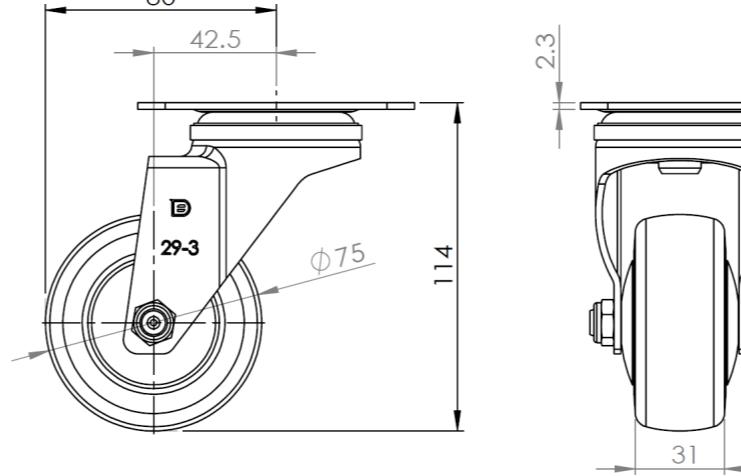

Mounting

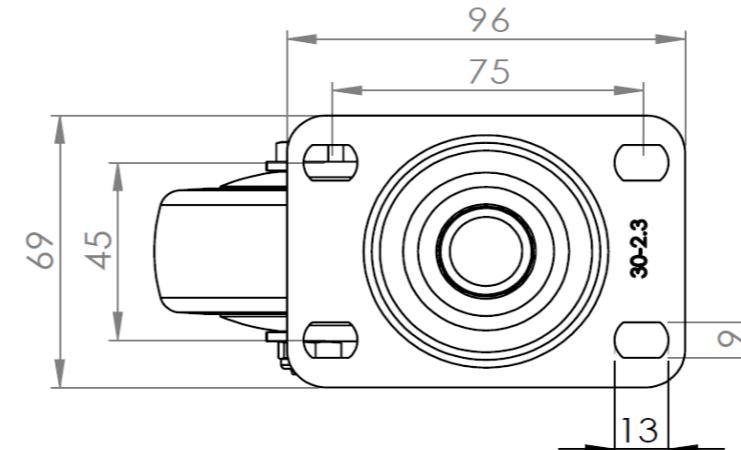

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com