

Product Data Sheet

1106 Instrument Series

Full wheel diameter × wheel width 75 x 31mm

EAN


TW-4110603001002

Movable tripod, the tripod uses a stamped bracket, galvanized, double bead channel, Base plate mounting device, wheel surface made of thermoplastic (PA6)

Wheel surface: thermoplastic (PA6)

Premium impact-resistant polypropylene

Product descriptions are for reference only. The actual product shall prevail.



Picture may differ from original product

Technical Data


☒ Metric ☐ Imperial

| | |
|-------------------------|-----------------------------------|
| Wheel Diameter | 75mm |
| Wheel Width | 31mm |
| Wheel Bearing | wheel equipped with ball bearings |
| Plate size | 92 x 70mm |
| Base plate hole spacing | 74.5 x 49mm 斜孔 |
| Plate hole | 15 x 10mm |
| Overall height | 113.5mm |
| Hardness of tread | 72±5° Shore A |
| Load capacity (dynamic) | 90kgs |
| Load capacity (static) | 135kgs |
| Temperature | -20°C to +60°C |
| Stand Style | fixed |
| Stainless steel | N/A |
| Conductive | N/A |
| Anti | N/A |
| Weight | 0.40kgs |
| Standard | ISO22883 |


Advantages at a glance


| | |
|----------------------------|-----------|
| Rolling Resistance | • • • • • |
| Operating Noise | • • • • • |
| Floor Surface Preservation | • • • • • |

Dimensions

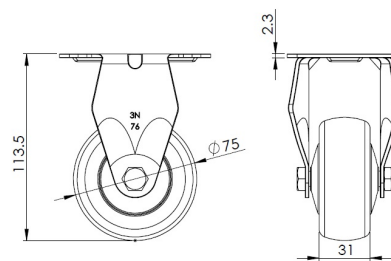

Mounting



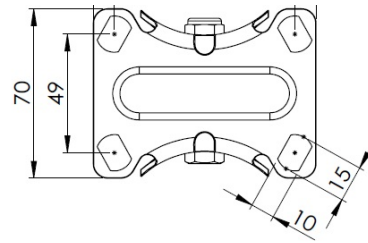

Drawings are for reference only and may differ from the product.

* For any deviation between metric and imperial spec, please refer to the metric spec.

© All rights reserved 2025 Deshang Shanghaolun www.dersheng.com