1106 Medical Caster Series

Dersheng Casters Keep Rolling

PPR Wheel Diameter × Wheel Width 75 x 25 mm

EAN


TW-4110603002029

Swivel Caster, Riveted Stamping Fork - 3/8" - 16 UNC Zine-Plated, Mounting Type - Threaded Stem High-Quality Impact-Resistant Polypropylene core, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread Dark gray, Bearing - Ball Bearing

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 75mm
Wheel Width 25mm

Wheel Bearing Wheel With Plain Bearing

Threaded Stem 3/8"-16牙
Threaded Size 40mm
Offset 24mm
Swivel Interference 122mm
Overall Height 110mm
Swivel Radius 61mm

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 50kgs

Load Capacity (Static) 75kgs

Temperature -20°C to +60°C
Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.50kgs

Standard ISO22883

Advantages at a glance

Rolling Resistance


• • • • 0

Operating Noise


• • • 0

Floor Surface Preservation $\bullet \bullet \bullet \bullet \bullet$

Dimensions

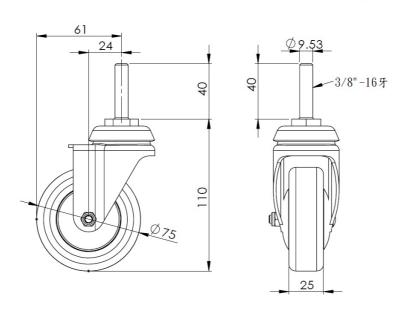

Mounting

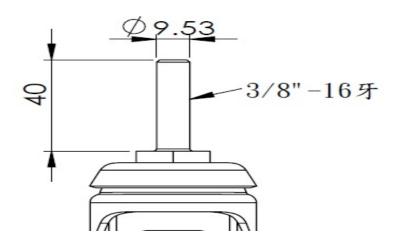

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.