1106 Medical Caster Series

Dersheng Casters Keep Rolling

PPR Wheel Diameter × Wheel Width 75 x 25 mm

EAN

TW-4110603002029


Swivel Caster, Riveted Stamping Fork - 3/8" - 16 UNC Zine-Plated, Mounting Type - Threaded Stem High-Quality Impact-Resistant Polypropylene core, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread Dark gray, Bearing - Ball Bearing

-4°F to +140°F

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

Temperature

	Impe	erial C	Metric
--	------	---------	--------

Wheel Diameter 3 "
Wheel Width 1 "

Wheel Bearing Wheel With Plain Bearing

Threaded Stem 3/8"-16牙
Threaded Size 1-5/8"
Offset 1"
Swivel Interference 4-7/8"
Overall Height 4-3/8"
Swivel Radius 2-7/16"

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 110lbs

Load Capacity (Static) 165lbs

Fork Type Swivel Caster
Stainless N/A
Electrical Conductivity N/A

Anti-Static N/A
Weight 1.1lbs
Standard ISO22883

Advantages at a glance


Rolling Resistance

• • • •


Operating Noise

Floor Surface Preservation $\bullet \bullet \bullet \bullet \bullet$

Dimensions

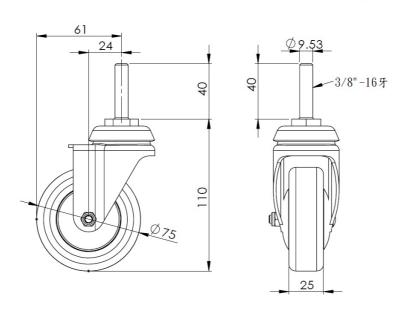

Mounting

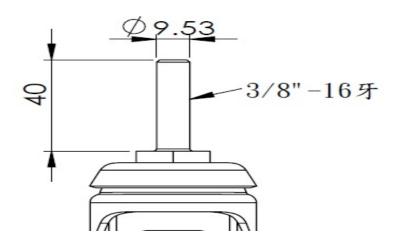

 $[\]boldsymbol{\ast}$ For any deviation between metric and imperial spec, please refer to the metric spec.