

1109 Medium Duty/Low Profile Business Machine Caster Series




Nylon Wheel Diameter × Wheel Width 50 x 25mm

EAN  
TW-4110902004001

Casters with Side Brakes and With locking system. Top Plate Riveted and Stamping.  
Zine-Plated, Mounting Type - Top Plate.  
Reinforced Polypropylene Wheel Center and Wheel Tread.  
Bearing - Plain Bearing style.

Wheel tread: Thermoplastic  
Wheel Center: Thermoplastic

Drawings are for reference only and may differ from the product

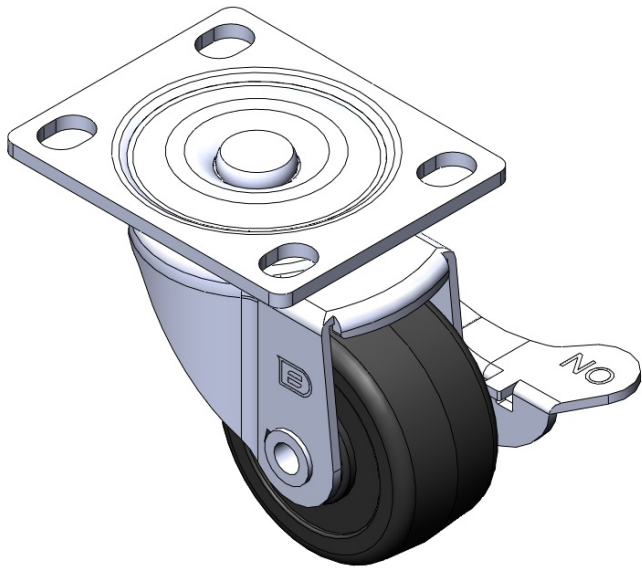

Picture may differ from original product


Technical Data

|                                                                        |                               |
|------------------------------------------------------------------------|-------------------------------|
| <input checked="" type="radio"/> Metric <input type="radio"/> Imperial |                               |
| Wheel Diameter                                                         | 50mm                          |
| Wheel Width                                                            | 25mm                          |
| Wheel Bearing                                                          | Wheel With Plain Bearing      |
| Plate Size                                                             | 70 x 58mm                     |
| Bolt Hole Spacing                                                      | 56 x 40mm                     |
| Plate Hole                                                             | 12 x 9mm                      |
| Offset                                                                 | 25.4mm                        |
| Swivel Interference                                                    | 125mm                         |
| Overall Height                                                         | 70mm                          |
| Swivel Radius                                                          | 62.5mm                        |
| Hardness Of Tread                                                      | 75±5° Shore D                 |
| Load Capacity (Dynamic)                                                | 70kgs                         |
| Load Capacity (Static)                                                 | 105kgs                        |
| Temperature                                                            | -20°C to +80°C                |
| Fork Type                                                              | Swivel Caster With Side Brake |
| Stainless                                                              | N/A                           |
| Electrical Conductivity                                                | N/A                           |
| Anti-Static                                                            | N/A                           |
| Weight                                                                 | 0.35kgs                       |
| Standard                                                               | ISO22883                      |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ○ ○ ○ |
| Floor Surface Preservation | ● ● ○ ○ ○ |

Dimensions

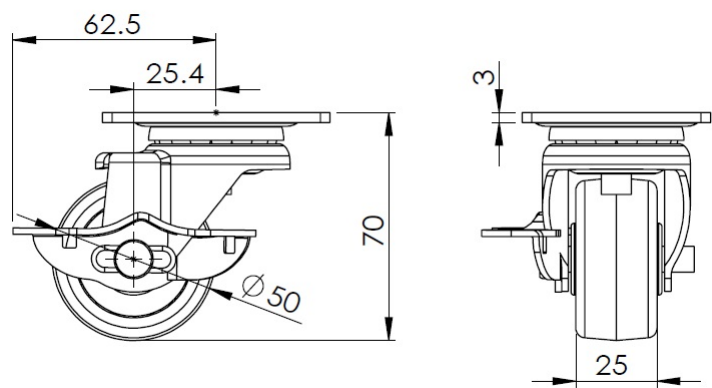

Mounting

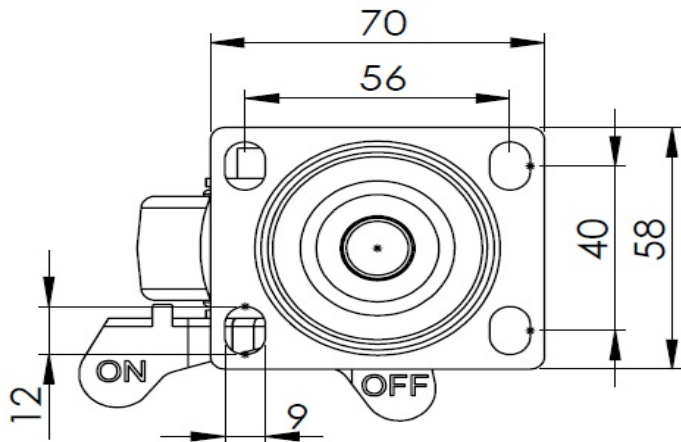

\* For any deviation between metric and imperial spec, please refer to the metric spec.