

1109 Medium Duty/Low Profile Business Machine Caster Series

Nylon Wheel Diameter x Wheel Width 50 x 25mm


EAN

TW-4110902004002

Casters with Side Brakes and With locking system. Threaded Stem Riveted Pressed Fork
 - M12-P1.75
 Zinc-Plated, Mounting Type - Threaded Stem
 Reinforced Polypropylene Wheel Center and Wheel Tread
 Bearing - Plain Bearing.

Wheel tread: Thermoplastic
 Wheel Center: Thermoplastic

Drawings are for reference only and may differ from the product

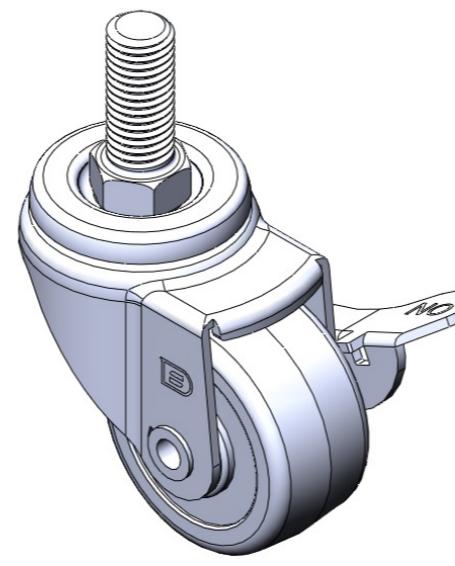

Picture may differ from original product

Technical Data


 Metric Imperial

Wheel Diameter	50mm
Wheel Width	25mm
Wheel Bearing	Wheel With Plain Bearing
Threaded Stem	M12-P1.75
Threaded Size	30mm
Offset	25.4mm
Swivel Interference	124mm
Overall Height	71mm
Swivel Radius	62mm
Hardness Of Tread	75±5° Shore D
Load Capacity (Dynamic)	70kgs
Load Capacity (Static)	105kgs
Temperature	-20°C to +80°C
Fork Type	Swivel Caster With Side Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.35kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • o o o
Floor Surface Preservation	• • o o o

Dimensions

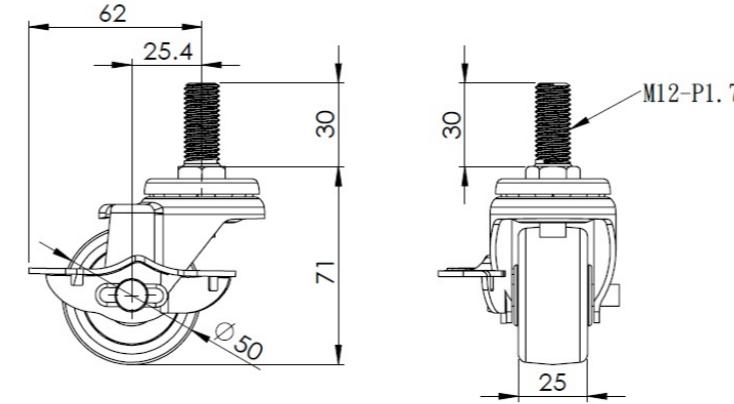

Mounting

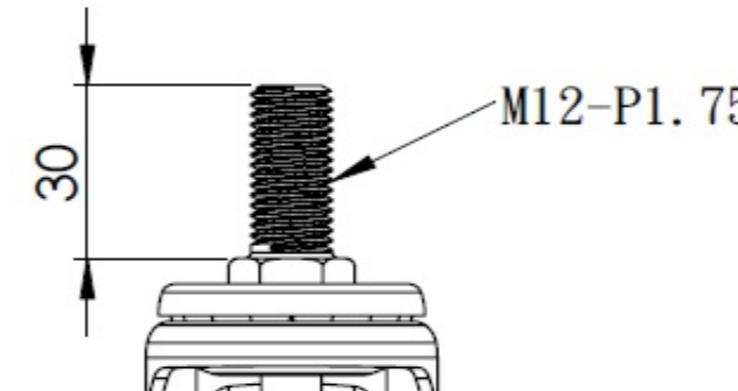

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com