

## 1109 Medium Duty/Low Profile Business Machine Caster Series

Nylon Wheel Diameter x Wheel Width 63 x 45mm


EAN

TW-4110902052004

Swivel Caster, Riveted Stamping Fork - 3/8-16 threads  
 Zinc-Plated, Mounting Type - Threaded Stem  
 Reinforced Polypropylene core and Wheel Tread  
 Bearing - Ball Bearing

Wheel surface: Thermoplastic  
 Wheel Center: thermoplastic

Drawings are for reference only and may differ from the product

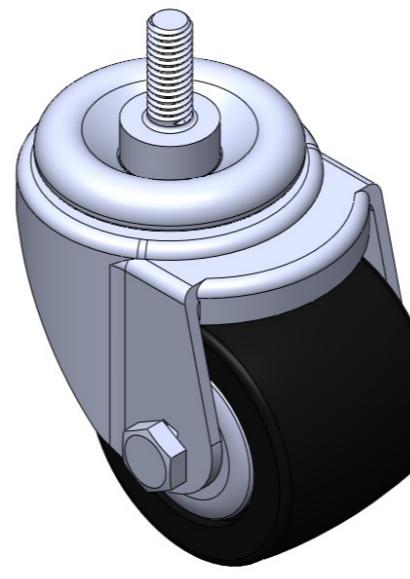

Picture may differ from original product

## Technical Data


 Metric  Imperial

Wheel Diameter	63mm
Wheel Width	45mm
Wheel Bearing	Wheels With Ball Bearings
Threaded Stem	3/8" -16牙
Threaded Size	25mm
Offset	27mm
Swivel Interference	116mm
Overall Height	90mm
Swivel Radius	58mm
Hardness Of Tread	75±5° Shore D
Load Capacity (Dynamic)	250kgs
Load Capacity (Static)	375kgs
Temperature	-20°C to +80°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.50kgs
Standard	ISO22883


## Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • o o o
Floor Surface Preservation	• • o o o

## Dimensions

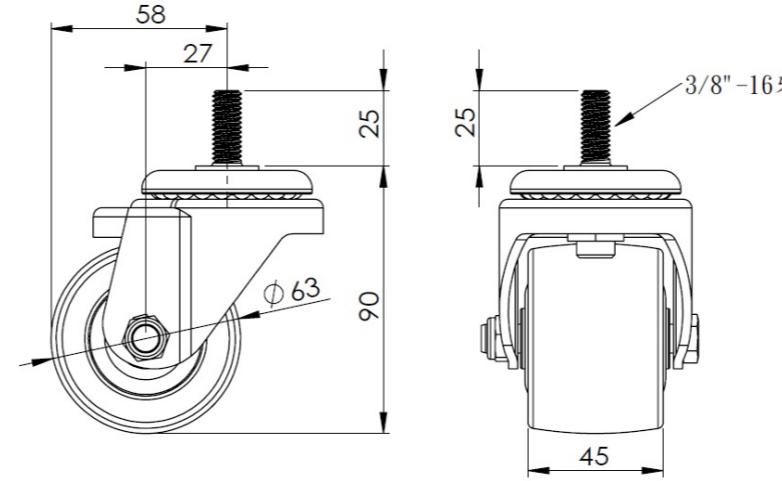

## Mounting

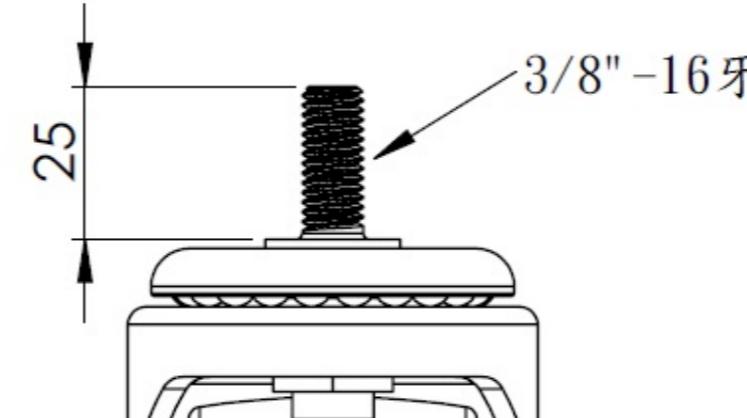

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com