

## 1109 Medium Duty/Low Profile Business Machine Caster Series




Nylon Wheel Diameter x Wheel Width 63 x 45mm

EAN

TW-4110902052013

Swivel Caster with Riveted Fork and Stamping Fork. Zinc-Plated, Mounting Type - Top Plate (with support feet). Reinforced Polypropylene and Wheel Tread. Bearings—Ball Bearings.

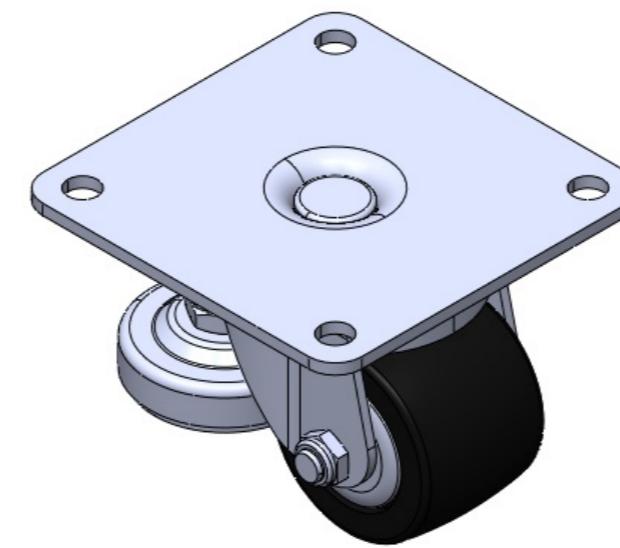

Wheel surface: Thermoplastic plastic (PA6)  
Wheel Center: Thermoplastic plastic (PA6)

Drawings are for reference only and may differ from the product

Picture may differ from original product

## Technical Data


Imperial  Metric

Wheel Diameter	2-1/2 "
Wheel Width	1-13/16 "
Wheel Bearing	Wheels With Ball Bearings
Plate Size	4-13/16 " x 4-13/16 "
Bolt Hole Spacing	3-3/4 " x 3-3/4 "
Plate Hole	3/8 "
Offset	1-1/16 "
Swivel Interference	5-9/16 "
Overall Height	3-9/16 "
Swivel Radius	2-13/16 "
Hardness Of Tread	75±5° Shore D
Load Capacity (Dynamic)	551lbs
Load Capacity (Static)	827lbs
Temperature	-4°F to +176°F
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	2.6lbs
Standard	ISO22883


## Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • o o o
Floor Surface Preservation	• • o o o

## Dimensions

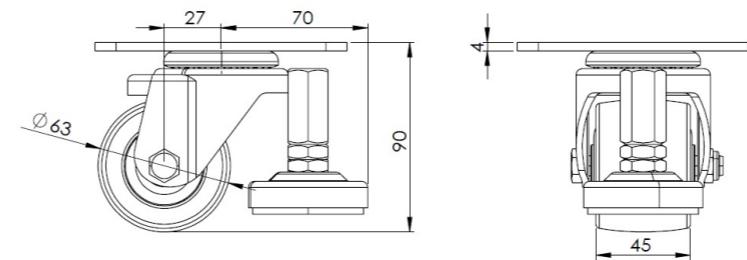

## Mounting

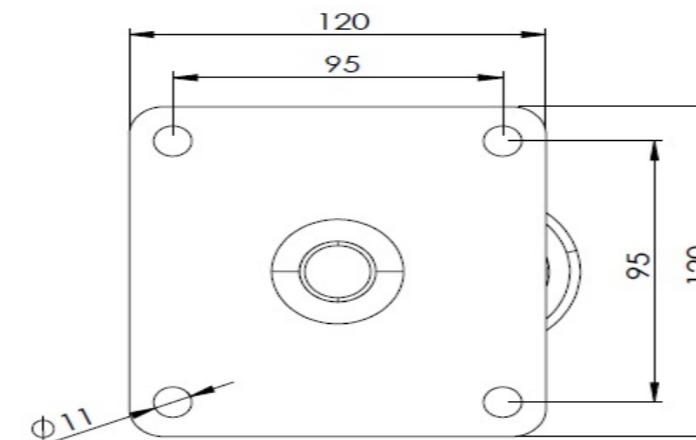

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com