

1109 Medium Duty/Low Profile Business Machine Caster Series




Nylon Wheel Diameter × Wheel Width 63 x 26mm

EAN
TW-4110902052018

Swivel Caster with Riveted Fork and Stamping Fork.
Zine-Plated, Mounting Type - Top Plate.
Reinforced Polypropylene Wheel Center and Wheel Tread (ROHS compliant).
Bearing - Plain Bearing.

Wheel tread: Thermoplastic
Wheel Center: Thermoplastic

Drawings are for reference only and may differ from the product

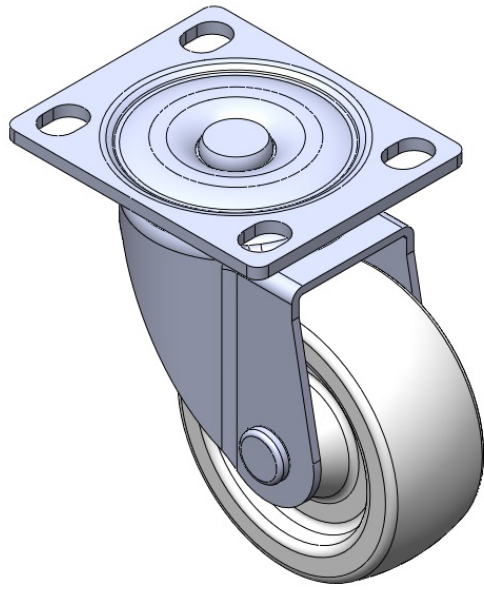

Picture may differ from original product


Technical Data

☒ Imperial ☐ Metric	
Wheel Diameter	2-1/2 "
Wheel Width	26mm
Wheel Bearing	Wheel With Plain Bearing
Plate Size	2-13/16 " x 2-5/16 "
Bolt Hole Spacing	2-1/4
Plate Hole	1/2 " x 23/64 "
Offset	1-1/16 "
Swivel Interference	4-5/8 "
Overall Height	3-7/16 "
Swivel Radius	2-5/16 "
Hardness Of Tread	75±5° Shore D
Load Capacity (Dynamic)	551lbs
Load Capacity (Static)	827lbs
Temperature	-4°F to +176°F
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	1.5lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ○ ○ ○
Floor Surface Preservation	● ● ○ ○ ○

Dimensions

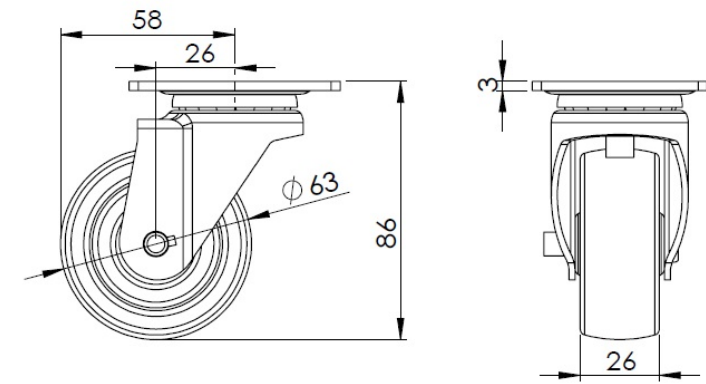

Mounting

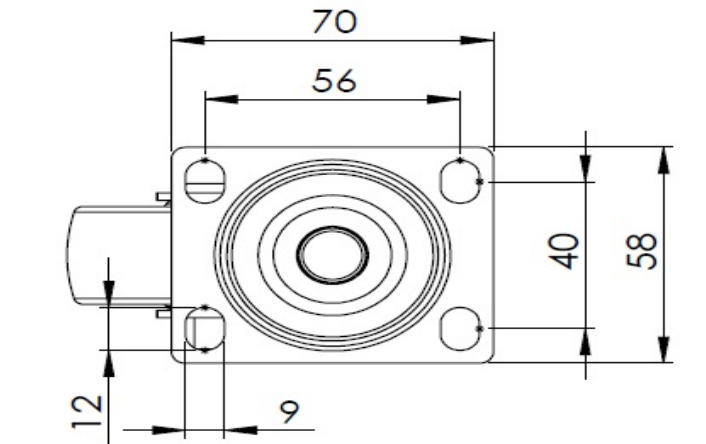

* For any deviation between metric and imperial spec, please refer to the metric spec.