

## 1109 Medium Duty/Low Profile Business Machine Caster Series



Nylon Wheel Diameter x Wheel Width 63 x 26mm


EAN

TW-4110902052019

Swivel Caster with Riveted Fork and Stamping Fork.  
 Zinc-Plated, Mounting Type - Top Plate.  
 Reinforced Polypropylene Wheel Center and Wheel Tread.  
 Bearing - Plain Bearing.

Wheel tread: Thermoplastic  
 Wheel Center: Thermoplastic

Drawings are for reference only and may differ from the product

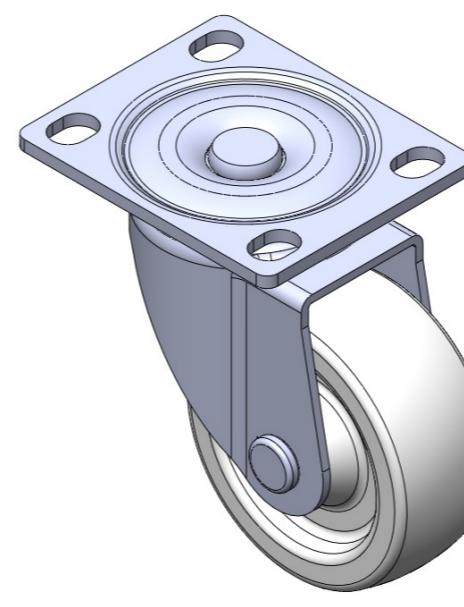

Picture may differ from original product

## Technical Data

Imperial  Metric

Wheel Diameter 2-1/2 "

Wheel Width 26mm

Wheel Bearing Wheel With Plain Bearing

Plate Size 2-13/16 " x 2-5/16 "

Bolt Hole Spacing 2-1/4

Plate Hole 1/2 " x 23/64 "

Offset 1-1/16 "

Swivel Interference 4-5/8 "

Overall Height 3-7/16 "

Swivel Radius 2-5/16 "

Hardness Of Tread 75±5° Shore D

Load Capacity (Dynamic) 551lbs

Load Capacity (Static) 827lbs

Temperature -4°F to +176°F

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.5lbs

Standard ISO22883


## Advantages at a glance

Rolling Resistance • • • •


Operating Noise • • o o o

Floor Surface Preservation • • o o o

## Dimensions

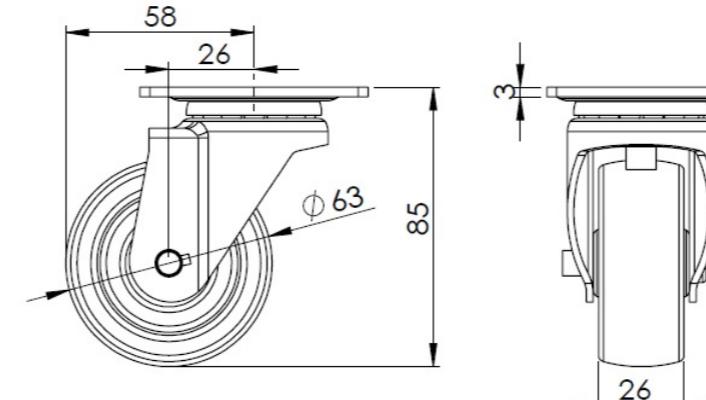

## Mounting

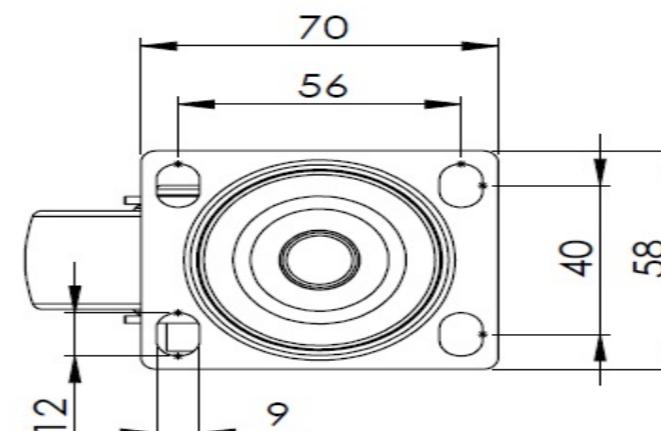

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com