

## 1109 Medium Duty/Low Profile Business Machine Caster Series



ZQPU Wheel Diameter x Wheel Width 63 x 20mm


EAN

TW-4110902052025

Portable Casters, Riveted and Stamping Top Plate—high-grade perforated design  
 Zinc-Plated surface, Mounting Type - Top Plate device  
 Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread  
 Blue color, Bearing—Ball Bearings.

Wheel surface: High-quality polyurethane  
 Wheel Center: Iron core/Cast iron core

Drawings are for reference only and may differ from the product

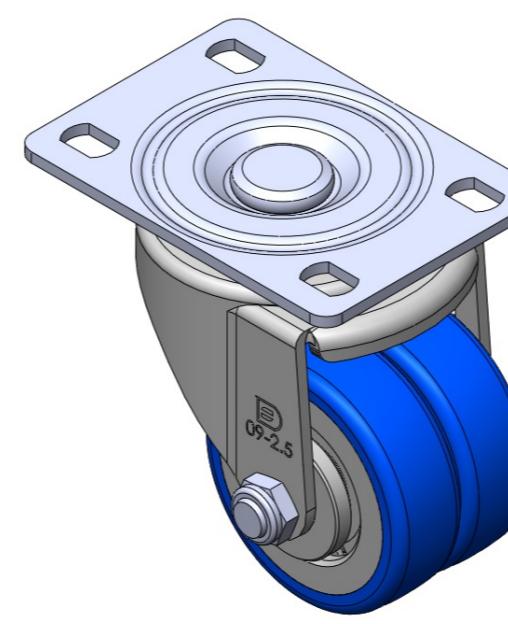

Picture may differ from original product

## Technical Data


Imperial  Metric

Wheel Diameter	2-1/2 "
Wheel Width	13/16 "
Wheel Bearing	Wheels With Ball Bearings
Plate Size	3-7/8 " x 2-3/4 "
Bolt Hole Spacing	3 " x 1-13/16 "
Plate Hole	9/16 " x 23/64 "
Offset	1-1/16 "
Swivel Interference	4-5/8 "
Overall Height	3-3/4 "
Swivel Radius	2-5/16 "
Hardness Of Tread	87±5° Shore A
Load Capacity (Dynamic)	661lbs
Load Capacity (Static)	992lbs
Temperature	-4°F to +158°F
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	1.7lbs
Standard	ISO22883


## Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • •
Floor Surface Preservation	• • • •

## Dimensions

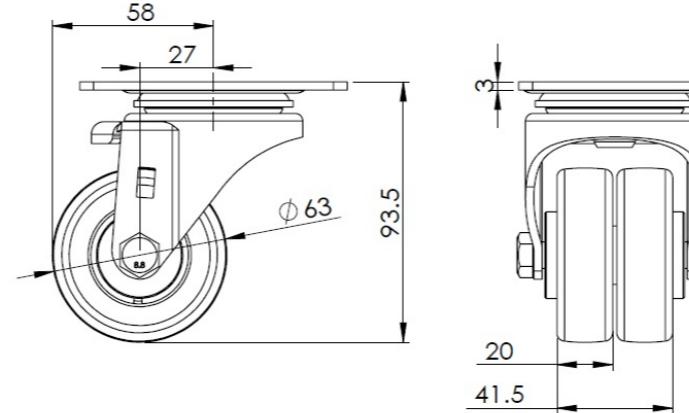

## Mounting

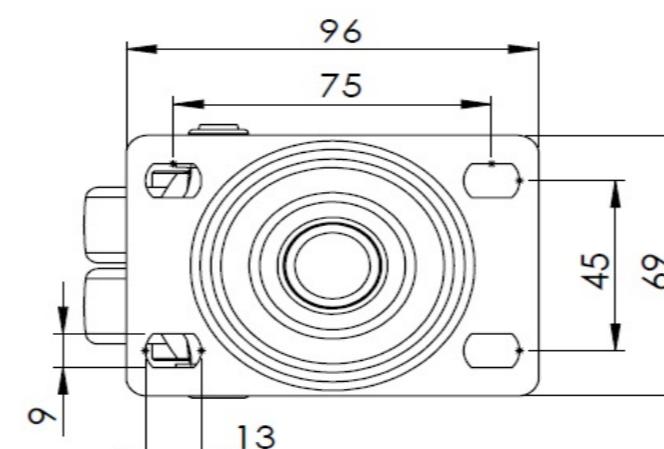

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2026 DershengInternational www.dersheng.com