

1109 Medium Duty/Low Profile Business Machine Caster Series




Nylon Wheel Diameter × Wheel Width 63 x 45mm

EAN
TW-4110902054002

Casters with Side Brakes and With locking system. Threaded Stem Riveted Pressed Fork – 1/2-13 threads.
Zine-Plated, Mounting Type - Threaded Stem.
Reinforced Polypropylene Wheel Center and Wheel Tread.
Bearing – Ball Bearing.

Wheel surface: Thermoplastic
Wheel Center: thermoplastic

Drawings are for reference only and may differ from the product

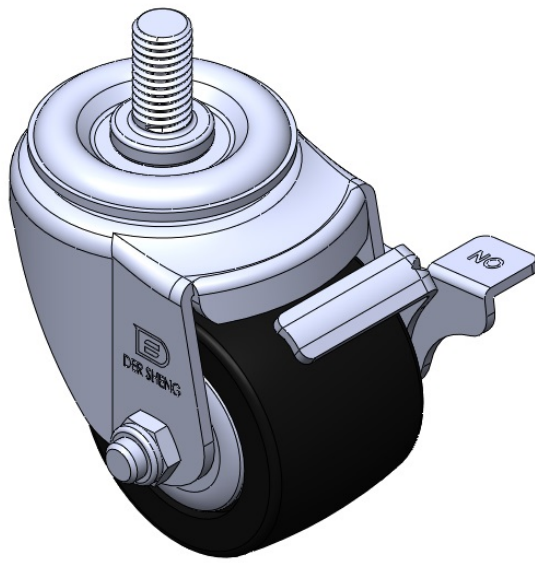

Picture may differ from original product


Technical Data

☒ Imperial ☐ Metric	
Wheel Diameter	2-1/2 "
Wheel Width	1-13/16 "
Wheel Bearing	Wheels With Ball Bearings
Threaded Stem	1/2 " -13牙
Threaded Size	1 "
Offset	1-1/16 "
Swivel Interference	5-7/16 "
Overall Height	3-1/2 "
Swivel Radius	2-11/16 "
Hardness Of Tread	65±5° Shore D
Load Capacity (Dynamic)	551lbs
Load Capacity (Static)	827lbs
Temperature	14°F to +140°F
Fork Type	Swivel Caster With Side Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	1.3lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ○ ○
Floor Surface Preservation	● ● ● ○ ○

Dimensions

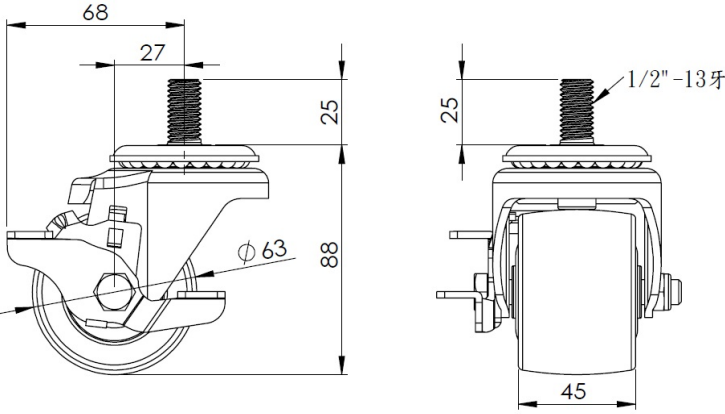

Mounting

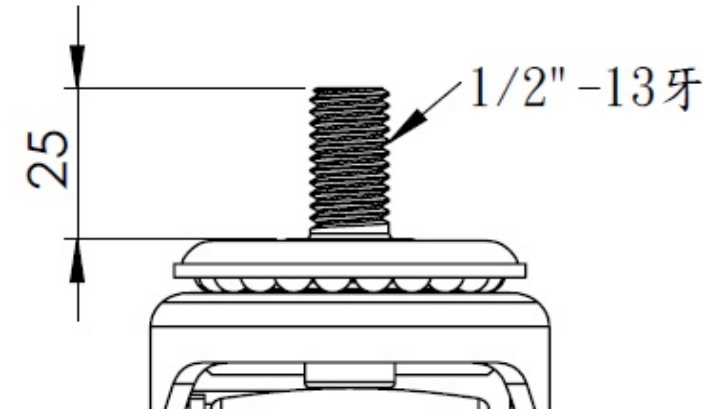

* For any deviation between metric and imperial spec, please refer to the metric spec.