

1109 Medium Duty/Low Profile Business Machine Caster Series



Nylon Wheel Diameter x Wheel Width 75 x 45mm

EAN

TW-4110903004018

Casters with Side Brakes and With locking system. Stamping, Riveted Fork with 5/8-11 thread.

Zinc-Plated, Mounting Type - Threaded Stem.


Reinforced Polypropylene Wheel Center and Wheel Tread.

Bearing - Plain Bearing.

Wheel surface: Thermoplastic

Wheel Center: thermoplastic

Drawings are for reference only and may differ from the product

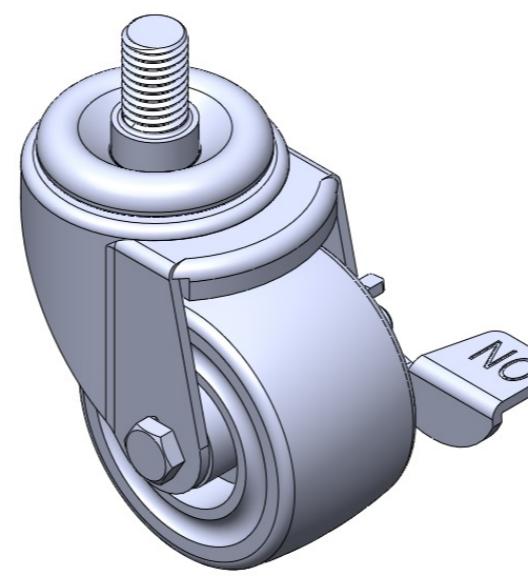

Picture may differ from original product

Technical Data

Imperial Metric

Wheel Diameter

3 "

Wheel Width

1-13/16 "

Wheel Bearing

Wheel With Plain Bearing

Threaded Stem

5/8 " -11牙

Threaded Size

1 "

Offset

1-1/4 "

Swivel Interference

6-1/2 "

Overall Height

4-1/16 " x .

Swivel Radius

3-5/16 "

Hardness Of Tread

75±5° Shore D

Load Capacity (Dynamic)

661lbs

Load Capacity (Static)

992lbs

Temperature

-4°F to +176°F

Fork Type

Swivel Caster With Side Brake

Stainless

N/A

Electrical Conductivity

N/A

Anti-Static

N/A

Weight

1.8lbs

Standard

ISO22883


Advantages at a glance

Rolling Resistance • • • •


Operating Noise • • o o o

Floor Surface Preservation • • o o o

Dimensions

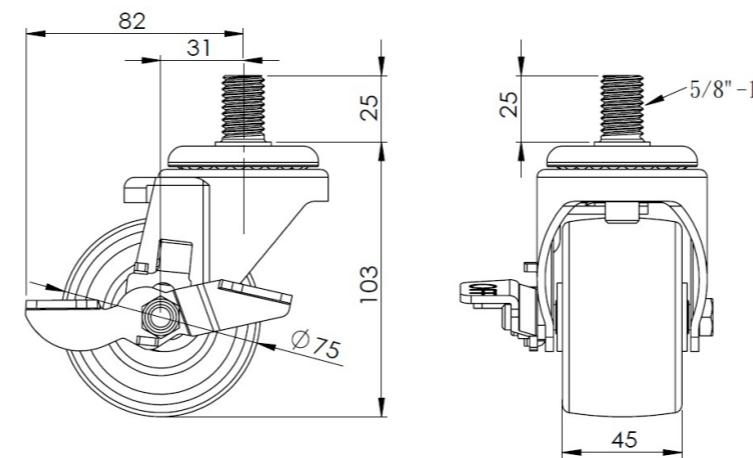

Mounting

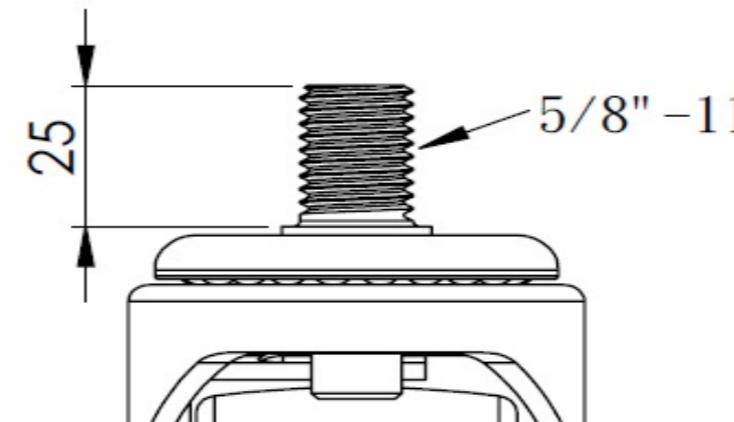

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com