# 1109 Medium Duty/Low Profile Business Machine Caster Series



King Kong Wheel Diameter × Wheel Width 75 x 45mm


EAN

TW-4110903004020

Castors with Side Brakes and Locking system. Top Plate Riveted Stamping Fork Surface Zine-Plated, Mounting Type - Top Plate Reinforced Polypropylene and Wheel Tread Bearing - Ball Bearing.

Wheel tread: Thermoplastic Wheel Center: Thermoplastic

Drawings are for reference only and may differ from the product



Picture may differ from original product

### Technical Data

● Metric ○ Imperial

Wheel Diameter 75mm
Wheel Width 45mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 105 x 80mm **Bolt Hole Spacing** 83 x 60mm Plate Hole 13 x 10mm 31mm Offset Swivel Interference 144mm Overall Height 107mm **Swivel Radius** 72mm Hardness Of Tread 75±5° Shore D

Load Capacity (Dynamic) 400kgs
Load Capacity (Static) 600kgs

Temperature -20°C to +80°C

Fork Type Swivel Caster With Side Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.85kgs

Standard ISO22883

## Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • • •

#### **Dimensions**

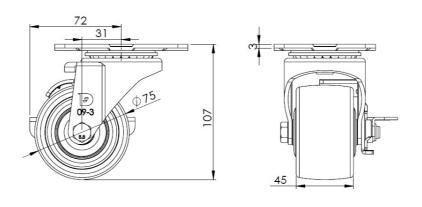

## Mounting

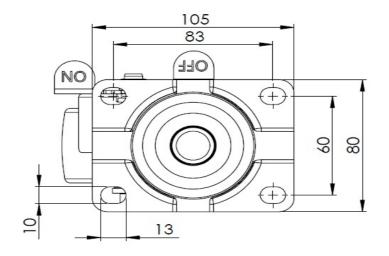

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.