

1109 Medium Duty/Low Profile Business Machine Caster Series




Phenolic wheel Wheel Diameter × Wheel Width 75 x 45mm

EAN  
TW-4110903004023

Casters with Side Brakes and With locking system. Threaded Stem Riveted Pressed Fork – 5/8-11 threads.  
Zine-Plated, Mounting Type - Threaded Stem.  
Phenolic Wheel.  
Bearing – Plain Bearing

Tread: Compressed synthetic resin impregnated with fabric  
Wheel Center: Compressed synthetic resin impregnated with fabric

Drawings are for reference only and may differ from the product

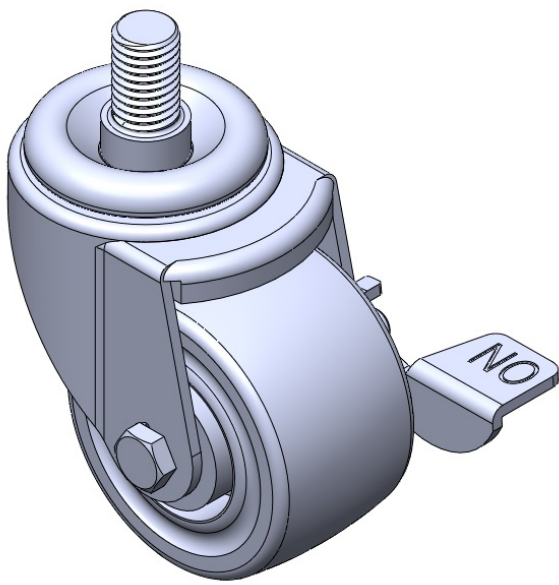

Picture may differ from original product


Technical Data

|                                                                        |                               |
|------------------------------------------------------------------------|-------------------------------|
| <input checked="" type="radio"/> Metric <input type="radio"/> Imperial |                               |
| Wheel Diameter                                                         | 75mm                          |
| Wheel Width                                                            | 45mm                          |
| Wheel Bearing                                                          | Wheel With Plain Bearing      |
| Threaded Stem                                                          | 5/8 " -11牙                    |
| Threaded Size                                                          | 25mm                          |
| Offset                                                                 | 31mm                          |
| Swivel Interference                                                    | 164mm                         |
| Overall Height                                                         | 103mm                         |
| Swivel Radius                                                          | 82mm                          |
| Hardness Of Tread                                                      | 80±5° Shore D                 |
| Load Capacity (Dynamic)                                                | 225kgs                        |
| Load Capacity (Static)                                                 | 337.5kgs                      |
| Temperature                                                            | -20°C to +150°C               |
| Fork Type                                                              | Swivel Caster With Side Brake |
| Stainless                                                              | N/A                           |
| Electrical Conductivity                                                | N/A                           |
| Anti-Static                                                            | N/A                           |
| Weight                                                                 | 0.85kgs                       |
| Standard                                                               | ISO22883                      |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ○ ○ ○ |
| Floor Surface Preservation | ● ● ○ ○ ○ |

Dimensions

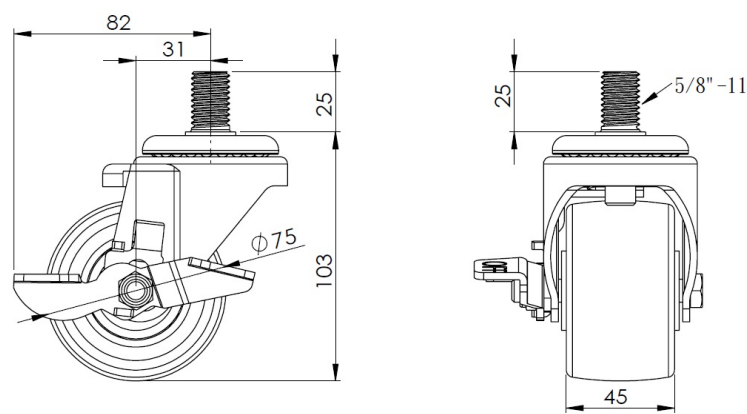

Mounting

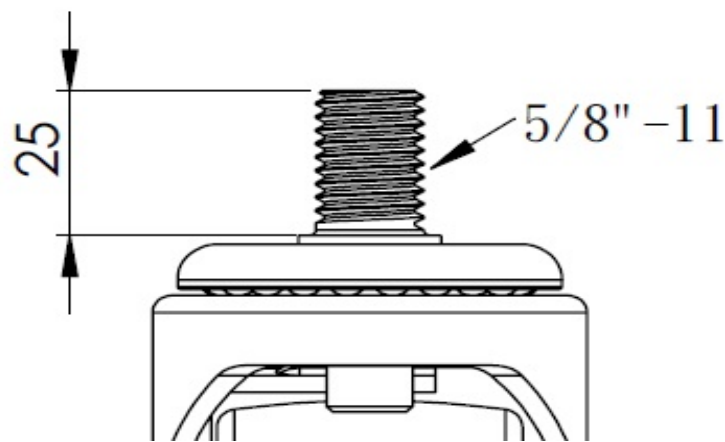

\* For any deviation between metric and imperial spec, please refer to the metric spec.