

1109 Medium Duty/Low Profile Business Machine Caster Series

Nylon Wheel Diameter x Wheel Width 75 x 45mm


EAN

TW-4110903004030

Side Brake Locking system. Thread-Riveted Fork— 1/2"-12 UNC Extended control lever surface, Mounting Type - Threaded Stem Reinforced Polypropylene and Wheel Tread Bearing—Ball Bearing.

Wheel tread: Thermoplastic
Wheel Center: Thermoplastic

Drawings are for reference only and may differ from the product

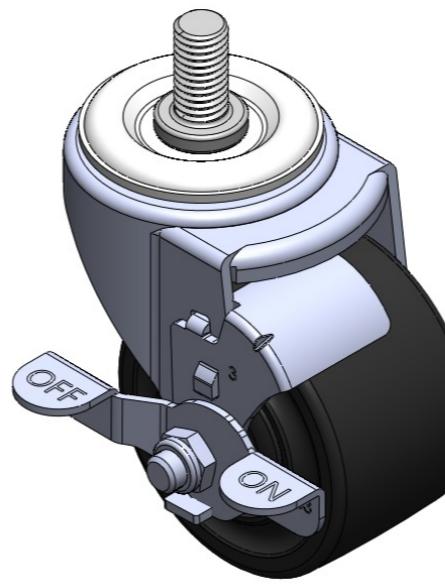

Picture may differ from original product

Technical Data


 Metric Imperial

Wheel Diameter	75mm
Wheel Width	45mm
Wheel Bearing	Wheels With Ball Bearings
Threaded Stem	1/2" -12牙
Threaded Size	25mm
Offset	31mm
Swivel Interference	144mm
Overall Height	104mm
Swivel Radius	72mm
Hardness Of Tread	75±5° Shore D
Load Capacity (Dynamic)	300kgs
Load Capacity (Static)	450kgs
Temperature	-20°C to +80°C
Fork Type	Swivel Caster With Side Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.80kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • o o o
Floor Surface Preservation	• • o o o

Dimensions

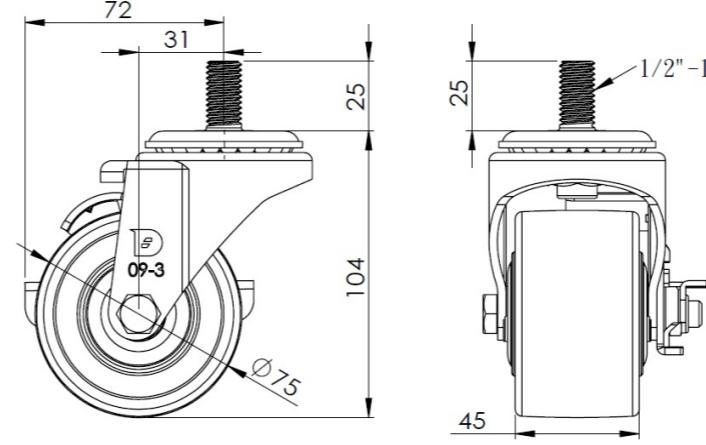

Mounting

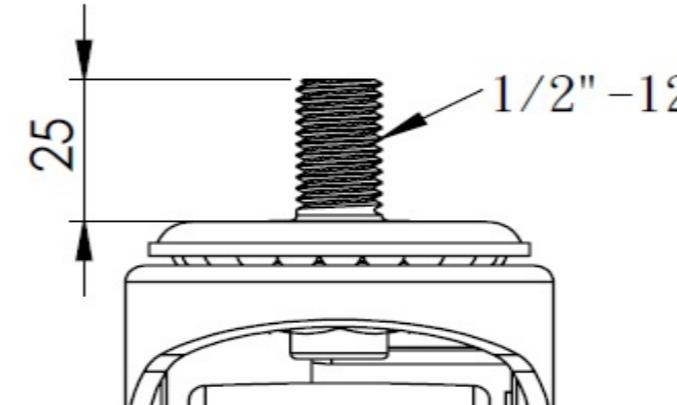

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com