

1109 Medium Duty/Low Profile Business Machine Caster Series

Nylon Wheel Diameter x Wheel Width 75 x 45mm


EAN

TW-4110903004030

Side Brake Locking system. Thread-Riveted Fork— 1/2"-12 UNC Extended control lever surface, Mounting Type - Threaded Stem Reinforced Polypropylene and Wheel Tread Bearing—Ball Bearing.

Wheel tread: Thermoplastic
Wheel Center: Thermoplastic

Drawings are for reference only and may differ from the product

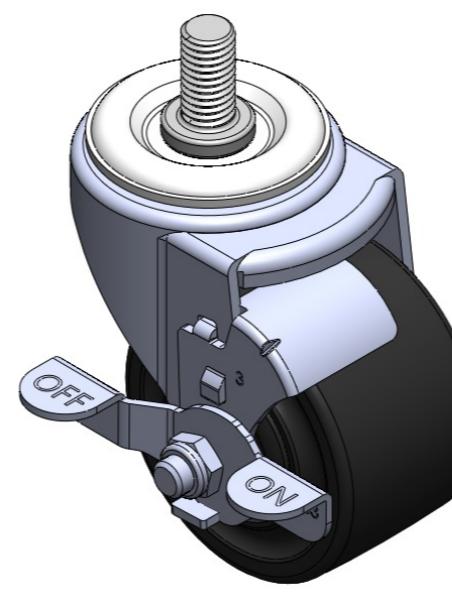

Picture may differ from original product

Technical Data

 Imperial Metric

Wheel Diameter 3 "

Wheel Width 1-13/16 "

Wheel Bearing Wheels With Ball Bearings

Threaded Stem 1/2 " -12牙

Threaded Size 1 "

Offset 1-1/4 "

Swivel Interference 5-3/4 "

Overall Height 4-1/8 "

Swivel Radius 2-7/8 "

Hardness Of Tread 75±5° Shore D

Load Capacity (Dynamic) 661lbs

Load Capacity (Static) 992lbs

Temperature -4°F to +176°F

Fork Type Swivel Caster With Side Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.8lbs

Standard ISO22883


Advantages at a glance

Rolling Resistance • • • •


Operating Noise • • o o o

Floor Surface Preservation • • o o o

Dimensions

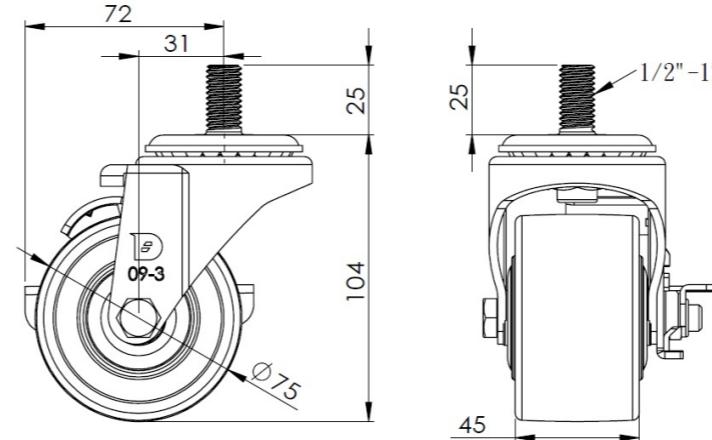

Mounting

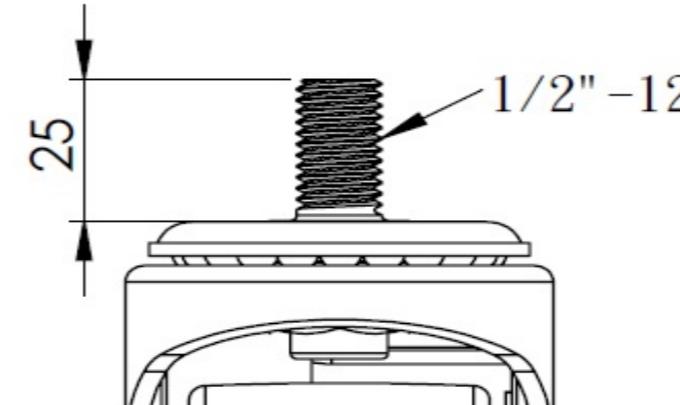

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com