# 1112 2" Wide General Purposes Caster Series

Dersheng Casters Keep Rolling

PU Wheel Diameter × Wheel Width 100 x 34mm

EAN

TW-4111204002018

Swivel Caster with Welded Caster Fork Zine-Plated, Mounting Type - Top Plate Cast Iron Wheel Center with High Quality Polyurethane tread Red, Bearing—Ball Bearing.

Wheel tread: high quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

### Technical Data

● Metric ○ Imperial

Wheel Diameter 100mm
Wheel Width 34mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 115 x 100mm **Bolt Hole Spacing** 85 x 70mm Plate Hole 20 x 11mm Offset 25mm Swivel Interference 150mm Overall Height 143mm **Swivel Radius** 75mm Hardness Of Tread 93±5° Shore A

Load Capacity (Dynamic) 270kgs

Load Capacity (Static) 405kgs

Temperature -20°C to +70°C

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 2.20kgs

Standard ISO22883

## Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • • •

#### **Dimensions**

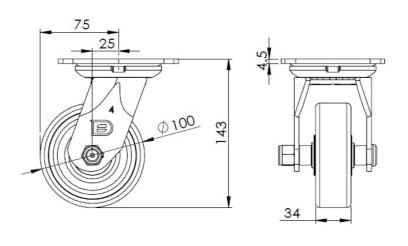

## Mounting

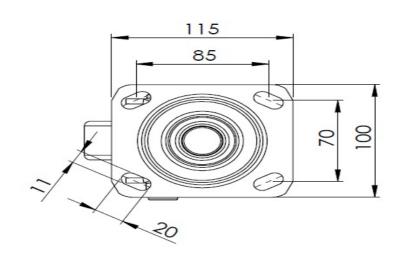

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.