1112 2" Wide General Purposes Caster Series

Dersheng Casters Keep Rolling

W Resolute Wheel Diameter × Wheel Width 127 x 50mm

EAN


TW-4111205001042

Rigid Caster with Welded Caster Fork Zine-Plated, Mounting Type - Top Plate Reinforced, impact-resistant High-quality Impact Resistance Polypropylene Wheel Center with High-Quality Thermoplastic Rubber (TPR) tread Gray color, Bearing—precision long bead.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

Wheel Width

ic

Hardness Of Tread

Wheel Diameter 5-1/16 "

Wheel Bearing Wheel With Annual Ball Bearing

72±5° Shore A

Plate Size 4-9/16 " x 4 "

Bolt Hole Spacing 3-3/8 " x 2-3/4 "

Plate Hole 13/16 " x 3/8 "

Overall Height 6-5/8 "

Load Capacity (Dynamic) 500lbs

Load Capacity (Static) 750lbs

Temperature -4°F to +140°F

Fork Type Rigid Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 3.9lbs

Standard ISO22883

Advantages at a glance


Rolling Resistance


Operating Noise

Floor Surface Preservation


• • • • •

Dimensions





Mounting

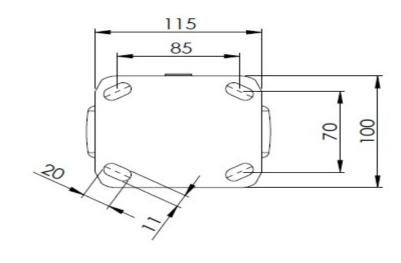

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.