1112 2" Wide General Purposes Caster Series



PU (red) Wheel Diameter × Wheel Width 125 x 45.5mm


EAN

TW-4111205001043

Rigid Caster with Welded Caster Fork Zine-Plated, Mounting Type - Top Plate Cast Iron Wheel Center with High Quality Polyurethane tread Red, Bearing—Annual Ball Bearing.

Wheel tread: high quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 5 "

Wheel Width 1-13/16 "

Wheel Bearing Wheel With Annual Ball Bearing

Plate Size 4-9/16 " x 4 "

Bolt Hole Spacing 3-3/8 " x 2-3/4 "

Plate Hole 13/16 " x 3/8 "

Overall Height 6-5/8 "

Hardness Of Tread 93±5° Shore A

Load Capacity (Dynamic) 794lbs

Load Capacity (Static) 1190lbs

Temperature -4°F to +158°F

Load Capacity (Static)

Temperature

Fork Type

Stainless

Rigid Caster

N/A

Electrical Conductivity

Anti-Static

N/A

Weight

Standard

NOCCEPTION 1190lbs

1190lbs

Rigid Caster

N/A

N/A

N/A

Standard

ISO22883

Advantages at a glance


Rolling Resistance


Operating Noise

Floor Surface Preservation


• • • • • •

Dimensions





Mounting

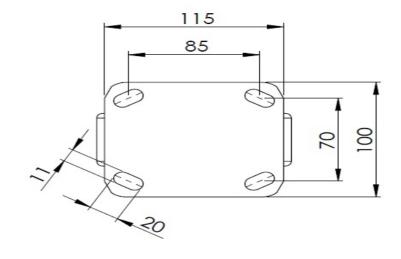

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.