



1112 2" Wide General Purposes Caster Series


EQPU (brown) Wheel Diameter × Wheel Width 125 x 40 mm

EAN
TW-4111205001065

Rigid Caster with Welded Caster Fork Zine-Plated, Mounting Type - Top Plate Cast Iron
Wheel Center with High Quality Polyurethane Wheel Tread (extra-thick rubber) Brown color, Bearing—Ball Bearing.

Wheel tread: high quality polyurethane
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

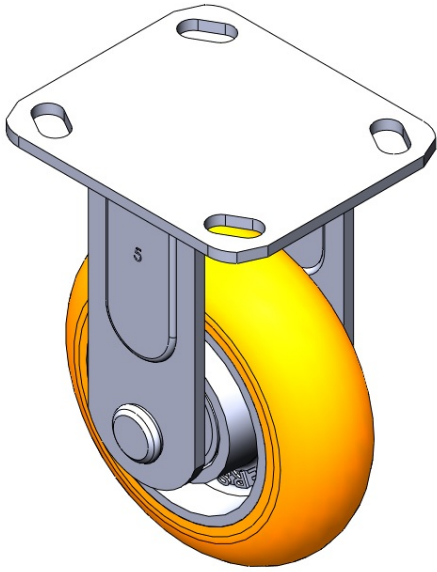

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter	125mm
Wheel Width	40mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	115 x 100mm
Bolt Hole Spacing	85 x 70mm
Plate Hole	20 x 11mm
Offset	54mm
Swivel Interference	260mm
Overall Height	165mm
Swivel Radius	60mm
Hardness Of Tread	92±5° Shore A
Load Capacity (Dynamic)	450kgs
Load Capacity (Static)	675kgs
Temperature	-20°C to +70°C
Fork Type	Rigid Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	2.30kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ●

Dimensions

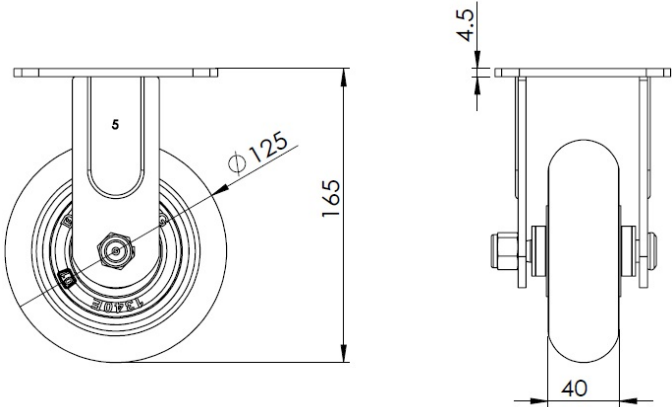

Mounting

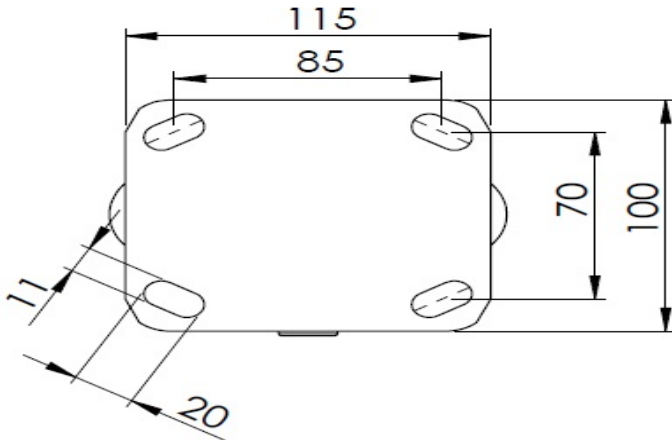

* For any deviation between metric and imperial spec, please refer to the metric spec.