# 1112 2" Wide General Purposes Caster Series

Dersheng Casters Keep Rolling

PPR (orange-yellow-black) Wheel Diameter × Wheel Width 125 x 50mm

EAN

TW-4111205001066

Rigid Caster with Welded Caster Fork Electrodeposited surface, Mounting Type - Top Plate High-Quality Impact-Resistant Polypropylene core with High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread Orange-black, Bearing—Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

#### Technical Data

● Imperial ○ Metric

Wheel Diameter 5 "

Wheel Width 2 "
Wheel Bearing Wheels With Ball Bearings

Plate Size 4-9/16 " x 4 "

 Bolt Hole Spacing
 3-3/8 " x 2-3/4 "

 Plate Hole
 13/16 " x 3/8 "

 Offset
 2-3/16 "

 Swivel Interference
 10-3/8 "

Overall Height 6-1/2 "

Swivel Radius 2-7/16 "

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 397lbs

Load Capacity (Static) 595lbs

Temperature -4°F to +140°F
Fork Type Rigid Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 3.0lbs

Standard ISO22883

### Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

### Dimensions

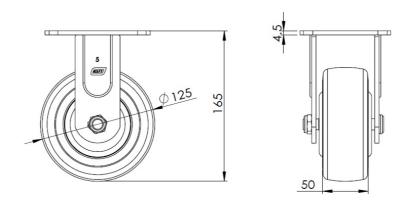

## Mounting

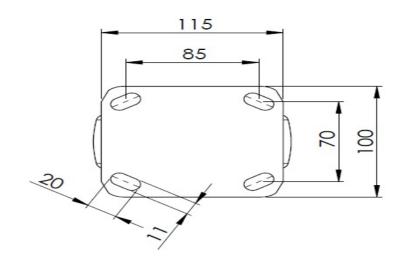

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.