# 1112 2" Wide General Purposes Caster Series

Dersheng Casters Keep Rolling

EQPU (blue) Wheel Diameter × Wheel Width 125 x 40 mm


EAN

TW-4111205001067

Rigid Caster with Welded Caster Fork Zine-Plated, Mounting Type - Top Plate Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread (extra-thick rubber) Blue color, Bearing—Ball Bearing.

Wheel tread: high quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

### **Technical Data**

● Imperial ○ Metric

Wheel Diameter

Wheel Width 1-5/8 "

Wheel Bearing Wheels With Ball Bearings

5 "

4-9/16 " x 4 " Plate Size 3-3/8 " x 2-3/4 " **Bolt Hole Spacing** 13/16 " x 3/8 " Plate Hole Offset 2-3/16 " 10-3/8 " Swivel Interference 6-1/2 " Overall Height 2-7/16 " **Swivel Radius** Hardness Of Tread 87±5° Shore A

Load Capacity (Dynamic) 992lbs

Load Capacity (Static) 1488lbs

Temperature -4°F to +158°F
Fork Type Rigid Caster

StainlessN/AElectrical ConductivityN/AAnti-StaticN/AWeight5.1lbsStandardISO22883

### Advantages at a glance


Rolling Resistance


Operating Noise

• • • • •


Floor Surface Preservation • • • • •

#### Dimensions





## Mounting

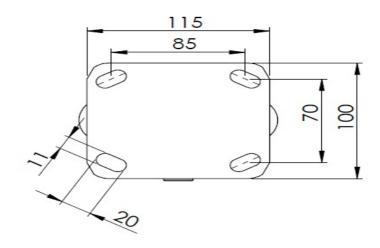

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.