



1112 2" Wide General Purposes Caster Series


PPU (red) Wheel Diameter × Wheel Width 127 x 50mm

EAN
TW-4111205002007

Swivel Caster with Welded Caster Fork Zine-Plated, Mounting Type - Top Plate (with plastic cover) High-quality Impact Resistance Polypropylene Wheel Center, thermoplastic polyurethane (TPU) tread Red, Bearing—Ball Bearing.

Wheel Tread: high quality thermoplastic rubber polyurethane (TPU)
Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

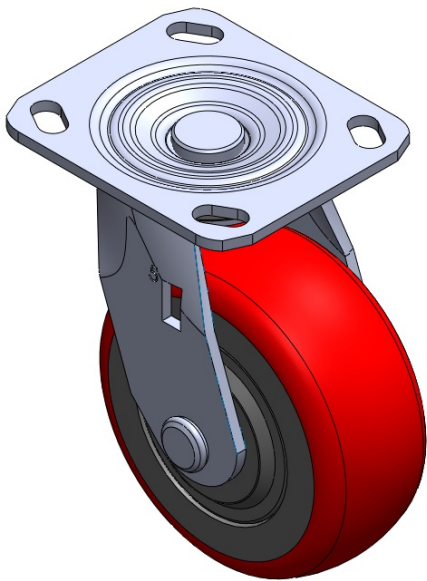

Picture may differ from original product


Technical Data

☒ Imperial ☐ Metric	
Wheel Diameter	5-1/16 "
Wheel Width	2 "
Wheel Bearing	Wheels With Ball Bearings
Plate Size	4-9/16 " x 4 "
Bolt Hole Spacing	3-3/8 " x 2-3/4 "
Plate Hole	13/16 " x 3/8 "
Offset	1-1/16 "
Swivel Interference	7-1/8 "
Overall Height	6-5/8 "
Swivel Radius	3-9/16 "
Hardness Of Tread	94±5° Shore A
Load Capacity (Dynamic)	551lbs
Load Capacity (Static)	827lbs
Temperature	-4°F to +158°F
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	4.4lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

Dimensions

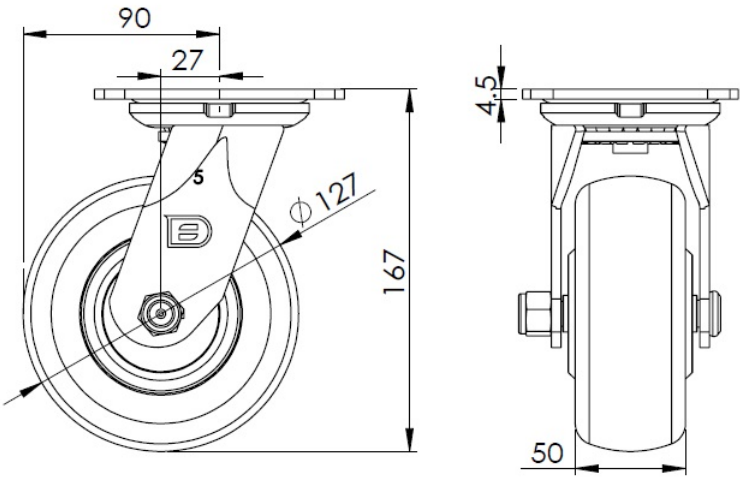

Mounting

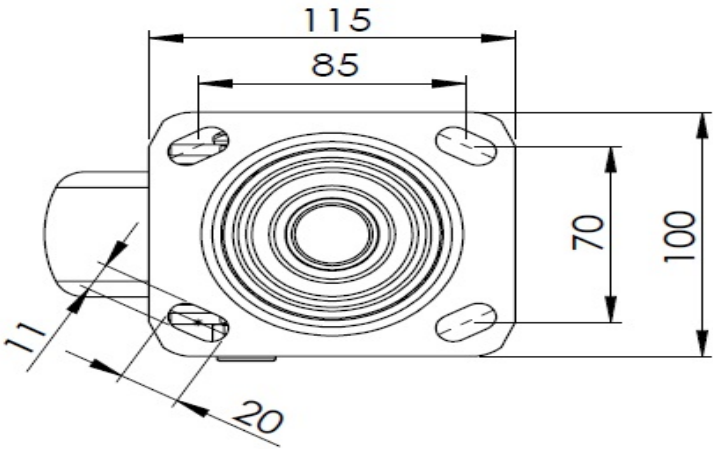

* For any deviation between metric and imperial spec, please refer to the metric spec.