



1112 2" Wide General Purposes Caster Series


PU (black) Wheel Diameter × Wheel Width 125 x 40mm

EAN
TW-4111205002033

Swivel Caster with Welded Caster Fork Zine-Plated, Mounting Type - Top Plate (no logo) (with iron cover) Cast Iron Wheel Center, High Quality Polyurethane tread Black, Bearing—Ball Bearing.

Wheel tread: high quality polyurethane
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

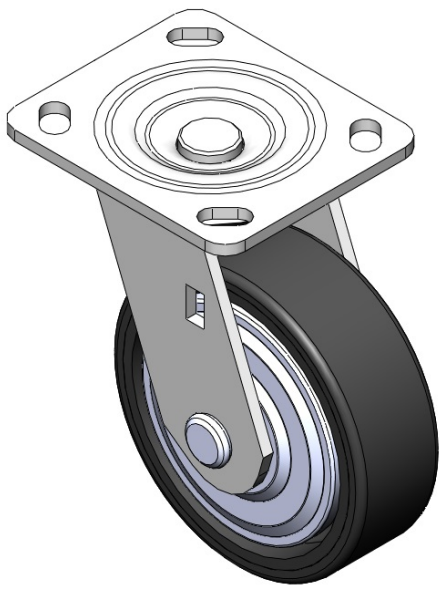

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter	125mm
Wheel Width	40mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	115 x 100mm
Bolt Hole Spacing	85 x 70mm
Plate Hole	20 x 11mm
Offset	33mm
Swivel Interference	192mm
Overall Height	166mm
Swivel Radius	96mm
Hardness Of Tread	93±5° Shore A
Load Capacity (Dynamic)	360kgs
Load Capacity (Static)	540kgs
Temperature	-20°C to +70°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	2.60kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

Dimensions

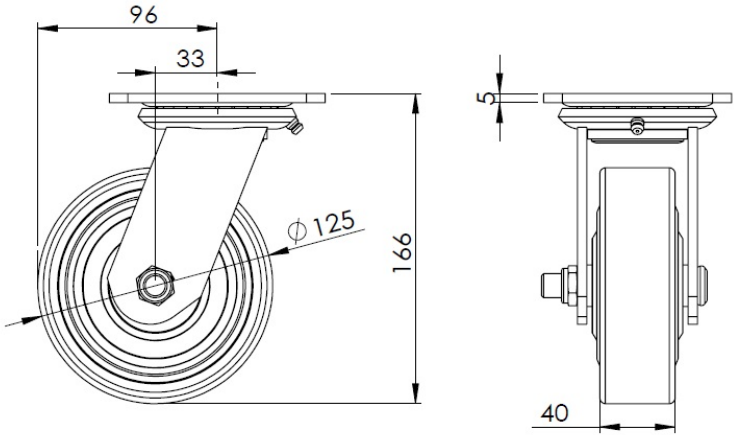

Mounting

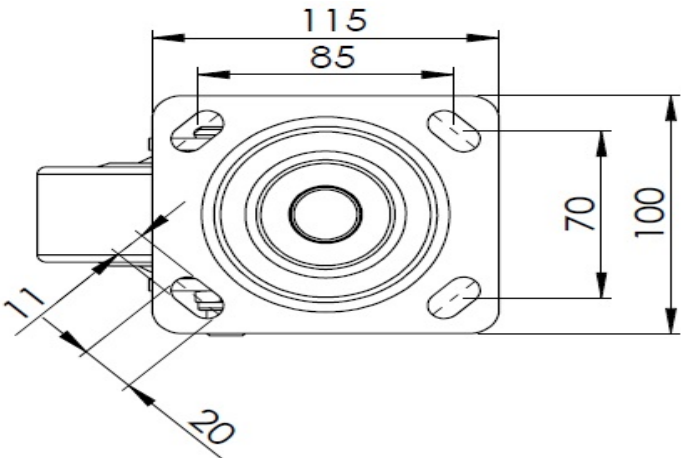

* For any deviation between metric and imperial spec, please refer to the metric spec.