1112 2" Wide General Purposes Caster Series



PU (red) Wheel Diameter × Wheel Width 125 x 45.5mm

EAN

TW-4111205002044

Swivel Caster with Welded Caster Fork Zine-Plated, Mounting Type - Top Plate Cast Iron Wheel Center with High Quality Polyurethane tread Red, Bearing—Annual Ball Bearing.

Wheel tread: high quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 5 "

Wheel Width 1-13/16 "

Wheel Bearing Wheel With Annual Ball Bearing

4-9/16 " x 4 " Plate Size 3-3/8 " x 2-3/4 " **Bolt Hole Spacing** 13/16 " x 3/8 " Plate Hole Offset 1-1/16 " 7-1/8 " Swivel Interference 6-5/8 " Overall Height 3-9/16 " **Swivel Radius** Hardness Of Tread 93±5° Shore A

Load Capacity (Dynamic)794lbsLoad Capacity (Static)1190lbsTemperature-4°F to +158°FFork TypeSwivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 5.5lbs

Standard ISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • • •

Dimensions

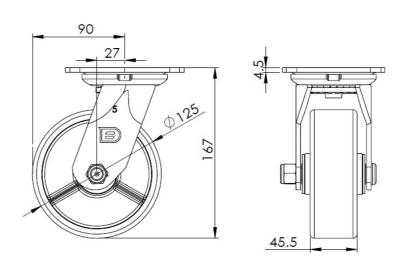

Mounting

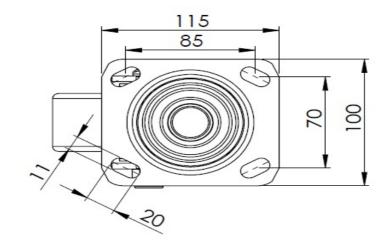

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.