1112 2" Wide General Purposes Caster Series

Dersheng Casters Keep Rolling

PU (black) Wheel Diameter × Wheel Width 125 x 40mm

EAN

TW-4111205002058

Swivel Caster with Welded Caster Fork Zine-Plated, Mounting Type - Top Plate (chrome-plated cover included) Cast Iron Wheel Center with High Quality Polyurethane tread Black, Bearing—Ball Bearing.

Wheel tread: high quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 125mm
Wheel Width 40mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 115 x 100mm **Bolt Hole Spacing** 85 x 70mm Plate Hole 20 x 11mm Offset 33mm 192mm Swivel Interference Overall Height 166mm **Swivel Radius** 96mm Hardness Of Tread 93±5° Shore A

Load Capacity (Dynamic) 360kgs

Load Capacity (Static) 540kgs

Temperature -20°C to +70°C
Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 2.60kgs


Standard ISO22883

Advantages at a glance


Rolling Resistance

• • • • • • • • • • • • • • • Floor Surface Preservation

Dimensions

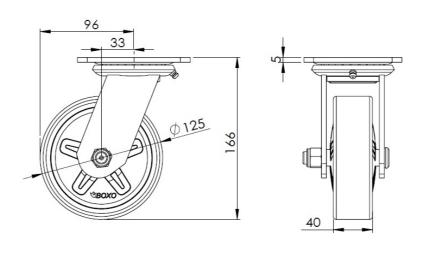

Mounting

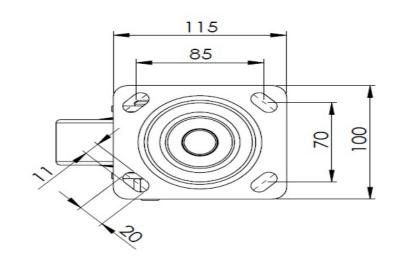

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.