



1112 2" Wide General Purposes Caster Series


PU (black) Wheel Diameter × Wheel Width 125 x 40mm

EAN
TW-4111205004031

Casters with Side Brakes and With locking system. Welded Caster Fork. Zine-Plated, Mounting Type - Top Plate (no logo). Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread (customizable chrome cap). Black finish. Bearings—Annual Ball Bearing.

Wheel tread: high quality polyurethane
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

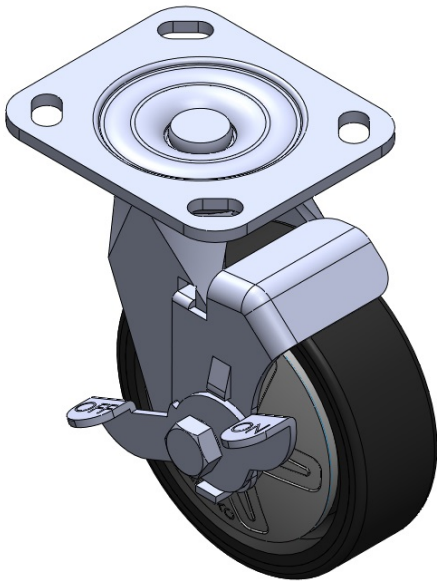

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter	125mm
Wheel Width	40mm
Wheel Bearing	Wheel With Annual Ball Bearing
Plate Size	115 x 100mm
Bolt Hole Spacing	85 x 70mm
Plate Hole	20 x 11mm
Offset	40mm
Swivel Interference	202mm
Overall Height	166mm
Swivel Radius	101mm
Hardness Of Tread	92±5° Shore A
Load Capacity (Dynamic)	360kgs
Load Capacity (Static)	540kgs
Temperature	-20°C to +70°C
Fork Type	Swivel Caster With Side Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	2.70kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

Dimensions

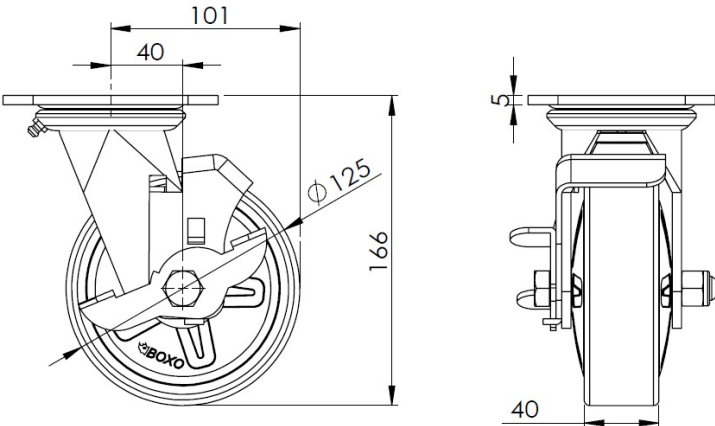

Mounting

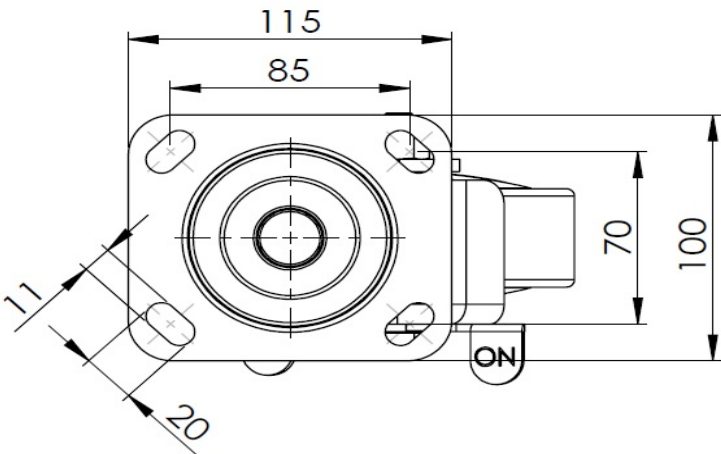

* For any deviation between metric and imperial spec, please refer to the metric spec.