



1112 2" Wide General Purposes Caster Series


PU (black) Wheel Diameter × Wheel Width 125 x 40mm

EAN
TW-4111205004031

Casters with Side Brakes and With locking system. Welded Caster Fork. Zine-Plated, Mounting Type - Top Plate (no logo). Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread (customizable chrome cap). Black finish. Bearings—Annual Ball Bearing.

Wheel tread: high quality polyurethane
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

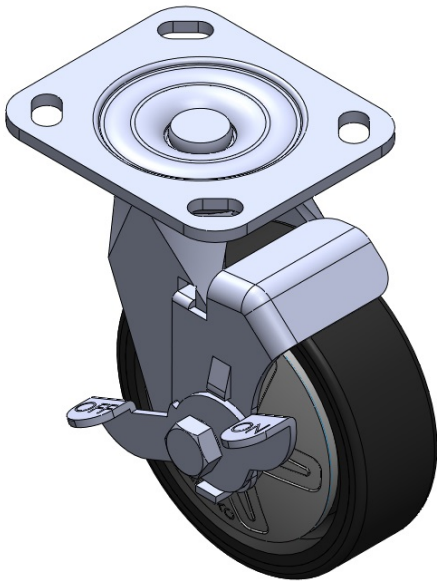

Picture may differ from original product


Technical Data

☒ Imperial ☐ Metric	
Wheel Diameter	5 "
Wheel Width	1-5/8 "
Wheel Bearing	Wheel With Annual Ball Bearing
Plate Size	4-9/16 " x 4 "
Bolt Hole Spacing	3-3/8 " x 2-3/4 "
Plate Hole	13/16 " 3/8 "
Offset	1-5/8 "
Swivel Interference	8 "
Overall Height	6-9/16 "
Swivel Radius	4 "
Hardness Of Tread	92±5° Shore A
Load Capacity (Dynamic)	794lbs
Load Capacity (Static)	1190lbs
Temperature	-4°F to +158°F
Fork Type	Swivel Caster With Side Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	6.0lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

Dimensions

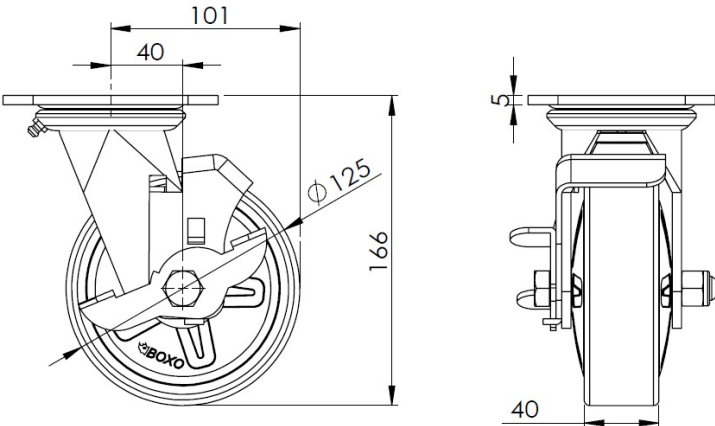

Mounting

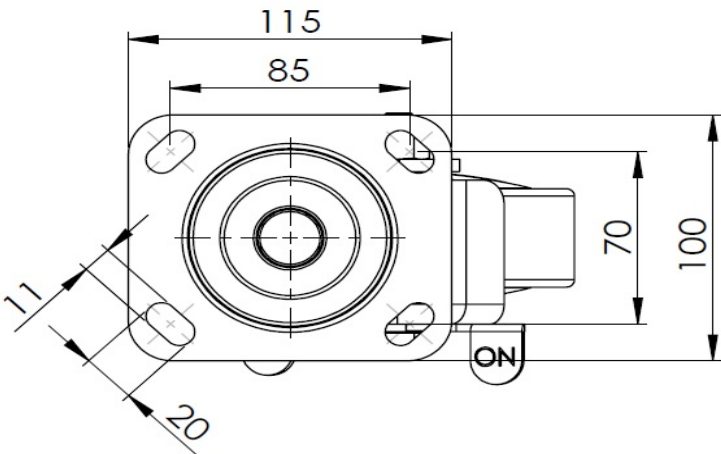

* For any deviation between metric and imperial spec, please refer to the metric spec.