1112 2" Wide General Purposes Caster Series

Dersheng Casters Keep Rolling

PU (black) Wheel Diameter × Wheel Width 125 x 45.5mm


EAN

TW-4111205004050

Casters with Side Brakes and With locking system. Welded Caster Fork. Zine-Plated. Mounting Type - Top Plate. Cast Iron core with High Quality Polyurethane Wheel Tread. Black. Bearings—Annual Ball Bearing.

Wheel tread: high quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 125mm
Wheel Width 45.5mm

Wheel Bearing Wheel With Annual Ball Bearing

Plate Size 115 x 100mm **Bolt Hole Spacing** 85 x 70mm Plate Hole 20 x 11mm Offset 27mm Swivel Interference 180mm Overall Height 167mm **Swivel Radius** 90mm Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 360kgs

Load Capacity (Static) 540kgs

Temperature -20°C to +70°C

Fork Type Swivel Caster With Side Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 2.70kgs

Standard ISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • • •

Dimensions

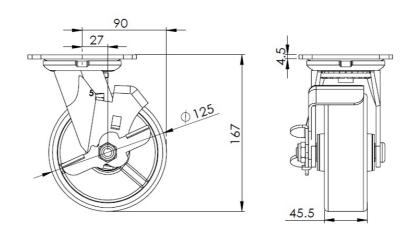

Mounting

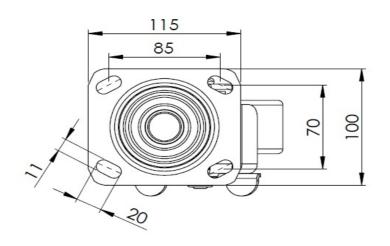

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.