


1112 2" Wide General Purposes Caster Series

PU (black) Wheel Diameter x Wheel Width 125 x 45.5mm

EAN

TW-4111205004051

Casters with Side Brakes and With locking system. Welded Caster Fork. Zinc-Plated. Mounting Type - Top Plate. Cast Iron core with High Quality Polyurethane Wheel Tread. Black. Bearings—Annual Ball Bearing.

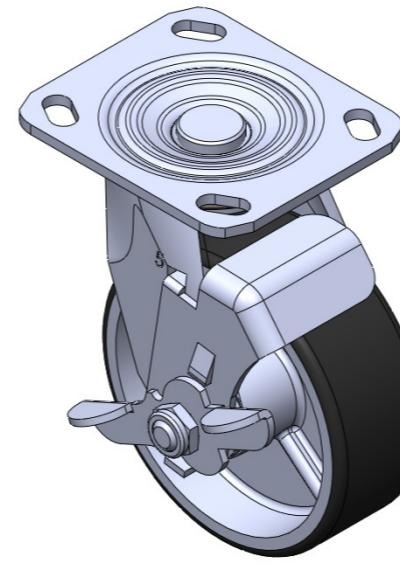

Wheel tread: high quality polyurethane
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data

 Imperial Metric

Wheel Diameter 5 "

Wheel Width 1-13/16 "

Wheel Bearing Wheel With Annual Ball Bearing

Plate Size 4-9/16 " x 4 "

Bolt Hole Spacing 3-3/8 " x 2-3/4 "

Plate Hole 13/16 " 3/8 "

Offset 1-1/16 "

Swivel Interference 180

Overall Height 6-5/8 "

Swivel Radius 3-9/16 "

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 794lbs

Load Capacity (Static) 1190lbs

Temperature -4°F to +158°F

Fork Type Swivel Caster With Side Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 6.0lbs

Standard ISO22883


Advantages at a glance

Rolling Resistance • • • ○ ○


Operating Noise • • • • ○

Floor Surface Preservation • • • • ○

Dimensions

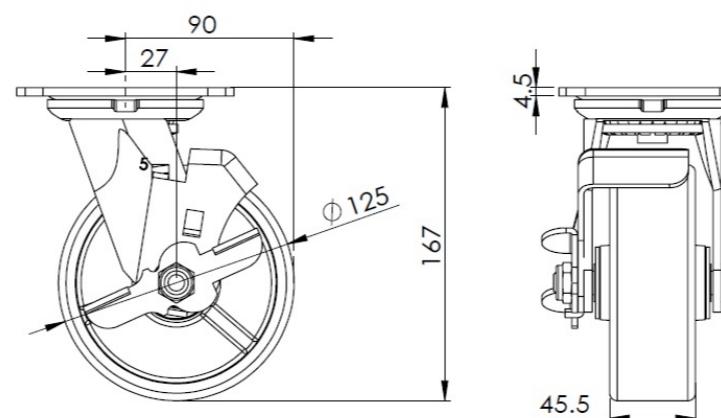

Mounting

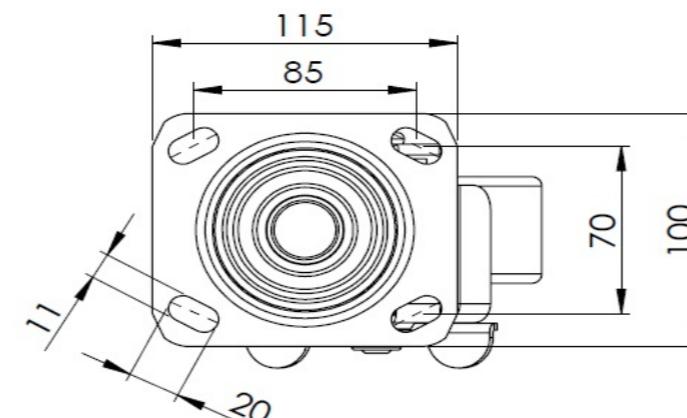

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com