1112 2" Wide General Purposes Caster Series

Dersheng Casters Keep Rolling

EQPU (brown) Wheel Diameter × Wheel Width 125 x 40 mm


EAN

TW-4111205004054

Casters with Side Brakes and With locking system. Welded Caster Fork Zine-Plated, Mounting Type - Top Plate Cast Iron core with High Quality Polyurethane Wheel Tread (extra-thick rubber) Brown color, Ball Bearings.

Wheel tread: high quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 125mm
Wheel Width 40mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 115 x 100mm **Bolt Hole Spacing** 85 x 70mm Plate Hole 20 x 11mm Offset 27mm Swivel Interference 180mm Overall Height 167mm **Swivel Radius** 90mm Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 450kgs
Load Capacity (Static) 675kgs

Temperature -20°C to +70°C

Fork Type Swivel Caster With Side Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 2.70kgs

Standard ISO22883

Advantages at a glance


Rolling Resistance


Operating Noise

Floor Surface Preservation


• • • • •

Dimensions





Mounting

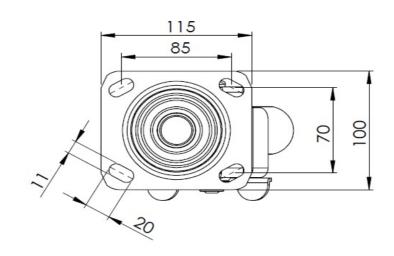

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.