# 1112 2" Wide General Purposes Caster Series

Dersheng Casters Keep Rolling

EQPU (brown) Wheel Diameter × Wheel Width 125 x 40 mm


EAN

TW-4111205004054

Casters with Side Brakes and With locking system. Welded Caster Fork Zine-Plated, Mounting Type - Top Plate Cast Iron core with High Quality Polyurethane Wheel Tread (extra-thick rubber) Brown color, Ball Bearings.

Wheel tread: high quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

### Technical Data

● Imperial ○ Metric

Wheel Diameter 5 "

Wheel Width 1-5/8 "

Wheel Bearing Wheels With Ball Bearings

4-9/16 " x 4 " Plate Size **Bolt Hole Spacing** 3-3/8 " x 2-3/4 " 13/16 " 3/8 " Plate Hole Offset 1-1/16 " 180 Swivel Interference 6-5/8 " Overall Height 3-9/16 " **Swivel Radius** Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 992lbs

Load Capacity (Static) 1488lbs

Temperature -4°F to +158°F

Fork Type Swivel Caster With Side Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 6.0lbs

Standard ISO22883

#### Advantages at a glance


Rolling Resistance


Operating Noise

Floor Surface Preservation


• • • • •

### Dimensions





## Mounting

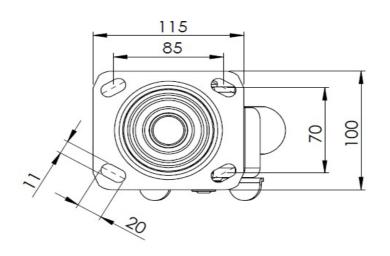

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.