



1112 2" Wide General Purposes Caster Series


Rubber (black) Wheel Diameter × Wheel Width 125 x 50.6mm

EAN  
TW-4111205004055

Casters with front brake and With locking system. Welded Caster Fork. Zine-Plated. Mounting Type - Top Plate. Cast Iron Wheel Center with High-Quality Resilient Rubber Wheel Tread. Black. Bearings—Annual Ball Bearings.

Wheel surface: high-quality elastic rubber  
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

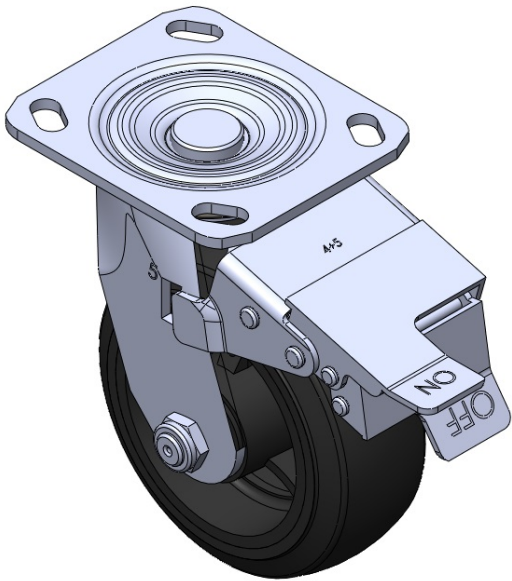

Picture may differ from original product


Technical Data

|                                                                        |                                |
|------------------------------------------------------------------------|--------------------------------|
| <input checked="" type="radio"/> Metric <input type="radio"/> Imperial |                                |
| Wheel Diameter                                                         | 125mm                          |
| Wheel Width                                                            | 50.6mm                         |
| Wheel Bearing                                                          | Wheel With Annual Ball Bearing |
| Plate Size                                                             | 115 x 100mm                    |
| Bolt Hole Spacing                                                      | 85 x 70mm                      |
| Plate Hole                                                             | 20 x 11mm                      |
| Offset                                                                 | 27mm                           |
| Swivel Interference                                                    | 290mm                          |
| Overall Height                                                         | 167mm                          |
| Swivel Radius                                                          | 145mm                          |
| Hardness Of Tread                                                      | 80±5° Shore A                  |
| Load Capacity (Dynamic)                                                | 200kgs                         |
| Load Capacity (Static)                                                 | 300kgs                         |
| Temperature                                                            | -20°C to +120°C                |
| Fork Type                                                              | Swivel Caster With Front Brake |
| Stainless                                                              | N/A                            |
| Electrical Conductivity                                                | N/A                            |
| Anti-Static                                                            | N/A                            |
| Weight                                                                 | 3.10kgs                        |
| Standard                                                               | ISO22883                       |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ○ ○ |
| Operating Noise            | ● ● ● ● ○ |
| Floor Surface Preservation | ● ● ● ● ○ |

Dimensions

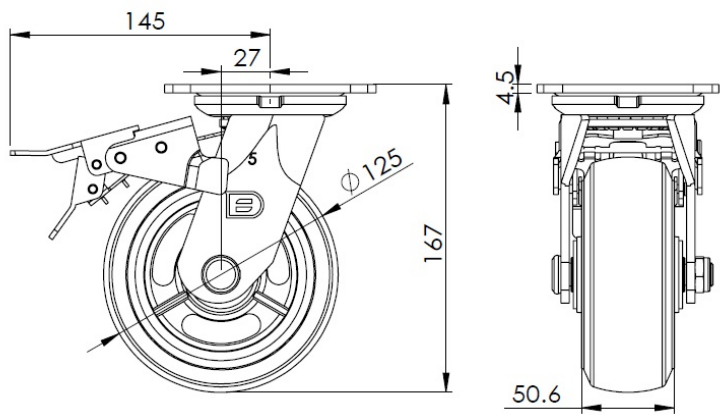

Mounting

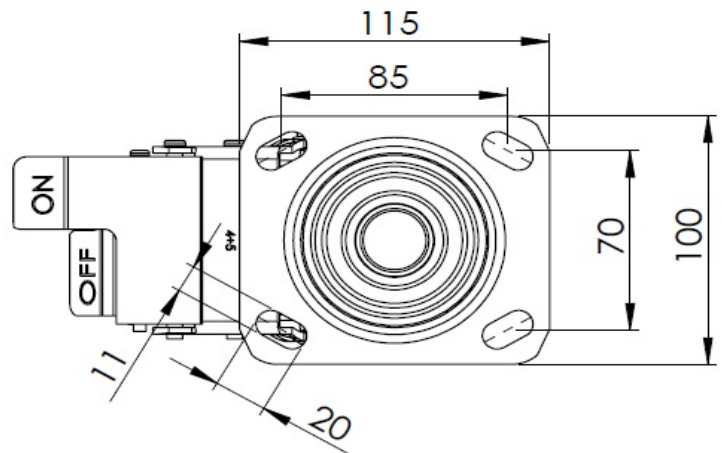

\* For any deviation between metric and imperial spec, please refer to the metric spec.