1112 2" Wide General Purposes Caster Series

Dersheng Casters Keep Rolling

Rubber (black) Wheel Diameter × Wheel Width 125 x 50.6mm


EAN

TW-4111205004055

Casters with front brake and With locking system. Welded Caster Fork. Zine-Plated. Mounting Type - Top Plate. Cast Iron Wheel Center with High-Quality Resilient Rubber Wheel Tread. Black. Bearings—Annual Ball Bearings.

Wheel surface: high-quality elastic rubber Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 5 "
Wheel Width 2 "

Wheel Bearing Wheel With Annual Ball Bearing

4-9/16 " x 4 " Plate Size **Bolt Hole Spacing** 3-3/8 " x 2-3/4 " 13/16 " 3/8 " Plate Hole 1-1/16 " Offset 290 Swivel Interference 6-5/8 " Overall Height 5-13/16" **Swivel Radius** Hardness Of Tread 80±5° Shore A

Load Capacity (Dynamic) 441lbs

Load Capacity (Static) 661lbs

Temperature -4°F to +248°F

Fork Type Swivel Caster With Front Brake

Stainless N/A

Electrical Conductivity N/A


Anti-Static N/A

Weight 6.8lbs


Standard ISO22883

Advantages at a glance

Dimensions

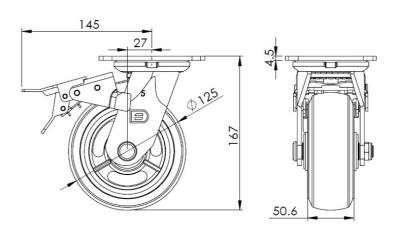

Mounting

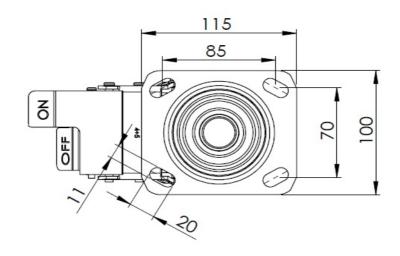

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.