1112 2" Wide General Purposes Caster Series

Dersheng Casters Keep Rolling

WHDR (red and black) Wheel Diameter × Wheel Width 127 x 50mm

EAN

TW-4111205004058

Casters with a front brake and With locking system. Welded Caster Fork. Electroplated surface. Mounting Type - Top Plate. High-Quality Impact-Resistant Polypropylene Wheel Center with High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread. Red and black. Bearings—Annual Ball Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 5-1/16 "
Wheel Width 2 "

Wheel Bearing Wheel With Annual Ball Bearing

4-9/16" x 4" Plate Size 3-3/8 " x 2-3/4 " **Bolt Hole Spacing** 13/16 x " 3/8 " Plate Hole 1-5/16 " Offset 290 Swivel Interference 6-5/8 " Overall Height 5-13/16 " **Swivel Radius** Hardness Of Tread 95±5° Shore A

Load Capacity (Dynamic) 750lbs

Load Capacity (Static) 1124lbs

Temperature -4°F to +140°F

Fork Type Swivel Caster With Front Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 5.7lbs

Standard ISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • • •

Dimensions

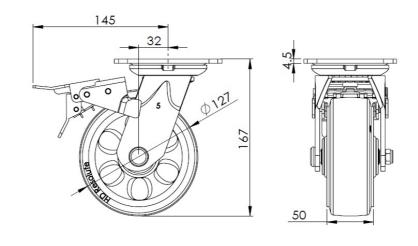

Mounting

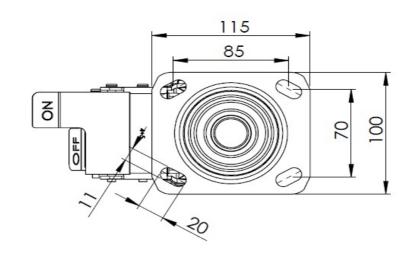

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.