1112 2" Wide General Purposes Caster Series

Dersheng Casters Keep Rolling

PPR (grey) Wheel Diameter × Wheel Width 152 x 50.5mm

EAN


TW-4111206001040

Rigid Caster with Welded Caster Fork Zine-Plated, Mounting Type - Top Plate High-quality Impact Resistance Polypropylene Wheel Center with High-Quality Thermoplastic Rubber (TPR) tread Gray, Bearing—precision long bead.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

Wheel Width

● Metric ○ Imperial

Wheel Diameter 152mm

Wheel Bearing Wheel With Annual Ball Bearing

50.5mm

Plate Size 115 x 100mm

Bolt Hole Spacing 85 x 70mm

Plate Hole 20 x 11mm

Overall Height 190mm

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 160kgs

Load Capacity (Static) 240kgs

Temperature -20°C to +60°C

Fork Type Rigid Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.50kgs

Standard ISO22883

Advantages at a glance

Rolling Resistance


 \bullet \bullet \bullet \circ

Operating Noise

• • • 0


Floor Surface Preservation • • • • •

Dimensions





Mounting

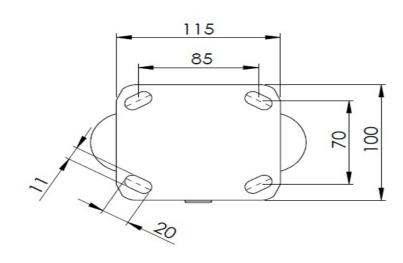

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.