1112 2" Wide General Purposes Caster Series



PU (red) Wheel Diameter × Wheel Width 150 x 49mm


EAN

TW-4111206001061

Rigid Caster with Welded Caster Fork Zine-Plated, Mounting Type - Top Plate Cast Iron Wheel Center with High Quality Polyurethane tread Red, Bearing—Annual Ball Bearing.

Wheel tread: high quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

Wheel Width

Standard

ic

6" Wheel Diameter

Wheel With Annual Ball Bearing


Wheel Bearing 4-9/16" x 4" Plate Size 3-3/8 " x 2-3/4 " **Bolt Hole Spacing** 13/16 " x 3/8 " Plate Hole 7-1/2 " Overall Height Hardness Of Tread 93±5° Shore A Load Capacity (Dynamic) 904lbs Load Capacity (Static) 1356lbs Temperature -4°F to +158°F Fork Type Rigid Caster Stainless N/A **Electrical Conductivity** N/A N/A Anti-Static Weight 6.6lbs


ISO22883

Advantages at a glance


Rolling Resistance **Operating Noise** Floor Surface Preservation • • • • •

Dimensions





Mounting

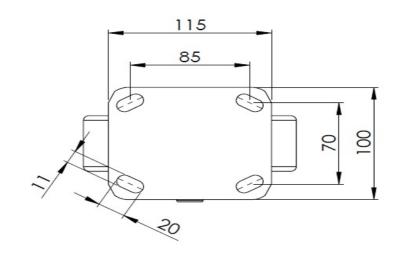

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.