1112 2" Wide General Purposes Caster Series

Dersheng Casters Keep Rolling

PU (red) Wheel Diameter × Wheel Width 150 x 49mm

EAN

TW-4111206002053

Swivel Caster with Welded Caster Fork Zine-Plated, Mounting Type - Top Plate Cast Iron Wheel Center with High Quality Polyurethane tread Red, Bearing—Annual Ball Bearing.

Wheel tread: high quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 150mm
Wheel Width 49mm

Wheel Bearing Wheel With Annual Ball Bearing

Plate Size 115 x 100mm **Bolt Hole Spacing** 85 x 70mm Plate Hole 20 x 11mm Offset 35mm 220mm Swivel Interference Overall Height 190mm **Swivel Radius** 110mm Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 410kgs
Load Capacity (Static) 615kgs

Temperature -20°C to +70°C
Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 2.80kgs

Standard ISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

Dimensions

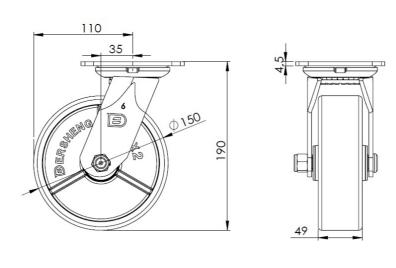

Mounting

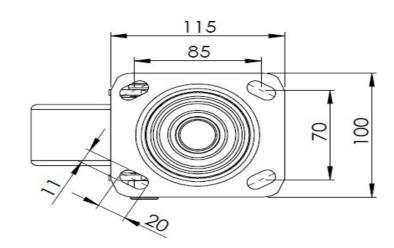

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.