1112 2" Wide General Purposes Caster Series

Dersheng Casters Keep Rolling

Rubber (black) Wheel Diameter × Wheel Width 150 x 50mm


EAN

TW-4111206004001

Casters with Side Brakes and With locking system. Welded Caster Fork. Electroplated finish. Mounting Type - Top Plate. Cast Iron Wheel Center with High-Quality Resilient Rubber Wheel Tread. Black. Bearings—Annual Ball Bearings.

Wheel surface: high-quality elastic rubber Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 150mm
Wheel Width 50mm

Wheel Bearing Wheel With Annual Ball Bearing

Plate Size 115 x 100mm **Bolt Hole Spacing** 85 x 70mm Plate Hole 20 x 11mm Offset 35mm 220mm Swivel Interference Overall Height 190mm **Swivel Radius** 110mm Hardness Of Tread 80±5° Shore A

Load Capacity (Dynamic) 250kgs

Load Capacity (Static) 375kgs

Temperature -20°C to +120°C

Fork Type Swivel Caster With Side Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 3.0kgs

Standard ISO22883

Advantages at a glance

Rolling Resistance


• • • 0 0


Operating Noise

• • • • 0


Floor Surface Preservation $\bullet \bullet \bullet \bullet \circ$

Dimensions





Mounting

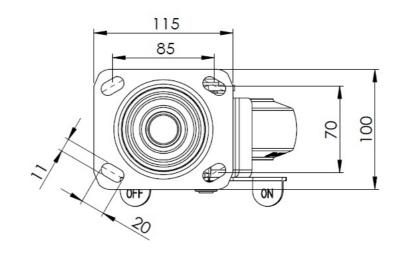

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.