1112 2" Wide General Purposes Caster Series

Dersheng Casters Keep Rolling

PU wheel (green) wheel diameter × wheel width 150 x 50.6mm


EAN

TW-4111206004003

Casters with Side Brakes and With locking system. Welded Caster Fork. Zine-Plated. Mounting Type - Top Plate. Cast Iron core with High Quality Polyurethane Wheel Tread. Green color. Bearings: Ball Bearings.

Wheel tread: high quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 150mm
Wheel Width 50.6mm

Wheel Bearing Wheel With Annual Ball Bearing

Plate Size 115 x 100mm **Bolt Hole Spacing** 85 x 70mm Plate Hole 20 x 11mm Offset 35mm Swivel Interference 224mm Overall Height 190mm **Swivel Radius** 112mm Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 410kgs
Load Capacity (Static) 615kgs

Temperature -20°C to +70°C

Fork Type Swivel Caster With Side Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 3.20kgs


Standard ISO22883


Advantages at a glance

Rolling Resistance


• • • • • • • • • • • • • • Floor Surface Preservation

Dimensions





Mounting

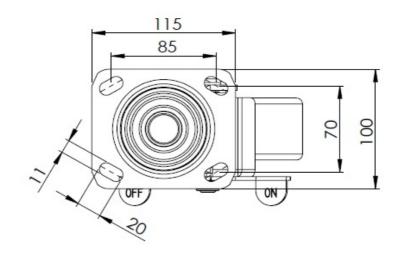

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.