



1112 2" Wide General Purposes Caster Series


Rubber (black) Wheel Diameter × Wheel Width 150 x 50mm

EAN  
TW-4111206004036

Casters with Side Brakes and With locking system. Welded Caster Fork. Zine-Plated. Mounting Type - Top Plate (no logo). Cast Iron core with High-Quality Resilient Rubber Wheel Tread. Black. Bearings—Annual Ball Bearings.

Wheel surface: high-quality elastic rubber  
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

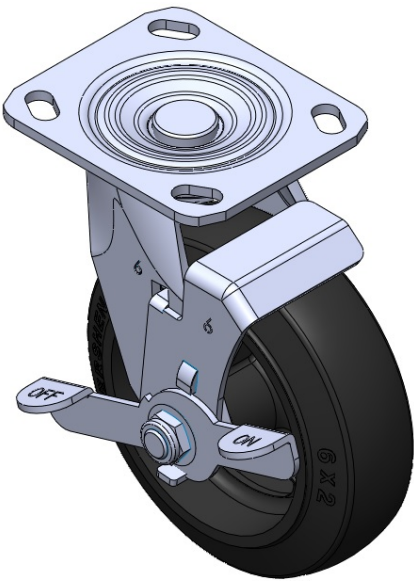

Picture may differ from original product


Technical Data

|                                                                        |                                |
|------------------------------------------------------------------------|--------------------------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric |                                |
| Wheel Diameter                                                         | 6 "                            |
| Wheel Width                                                            | 2 "                            |
| Wheel Bearing                                                          | Wheel With Annual Ball Bearing |
| Plate Size                                                             | 4-9/16 " x 4 "                 |
| Bolt Hole Spacing                                                      | 3-3/8 " x 2-3/4 "              |
| Plate Hole                                                             | 13/16 x " 3/8 "                |
| Offset                                                                 | 1-3/8 "                        |
| Swivel Interference                                                    | 220                            |
| Overall Height                                                         | 7-1/2 "                        |
| Swivel Radius                                                          | 4-3/8 "                        |
| Hardness Of Tread                                                      | 80±5° Shore A                  |
| Load Capacity (Dynamic)                                                | 551lbs                         |
| Load Capacity (Static)                                                 | 827lbs                         |
| Temperature                                                            | -4°F to +248°F                 |
| Fork Type                                                              | Swivel Caster With Side Brake  |
| Stainless                                                              | N/A                            |
| Electrical Conductivity                                                | N/A                            |
| Anti-Static                                                            | N/A                            |
| Weight                                                                 | 6.6lbs                         |
| Standard                                                               | ISO22883                       |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ○ ○ |
| Operating Noise            | ● ● ● ● ○ |
| Floor Surface Preservation | ● ● ● ● ○ |

Dimensions

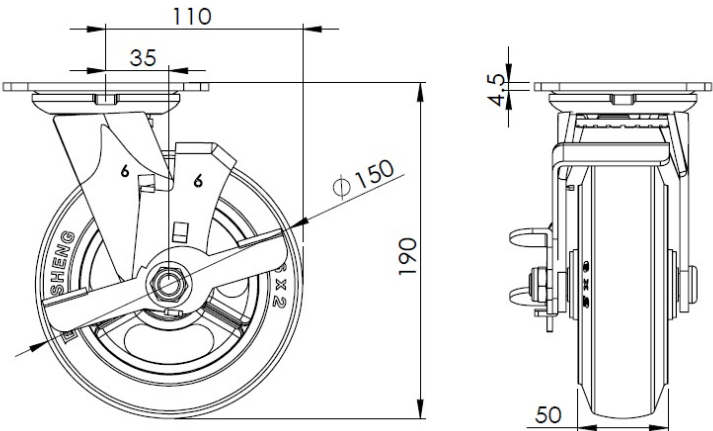

Mounting

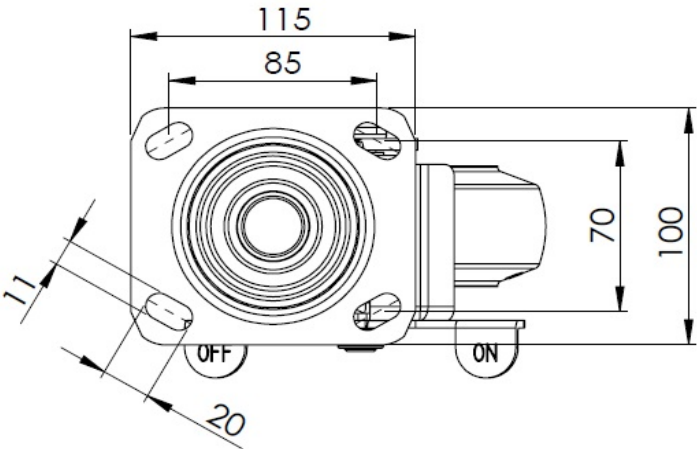

\* For any deviation between metric and imperial spec, please refer to the metric spec.