1112 2" Wide General Purposes Caster Series

Dersheng Casters Keep Rolling

Rubber (black) Wheel Diameter × Wheel Width 150 x 50mm


EAN

TW-4111206004039

Casters with Side Brakes and With locking system. Welded Caster Fork Zine-Plated, Mounting Type - Top Plate Cast Iron core with High-Quality Resilient Rubber Wheel Tread Black finish, Ball Bearings.

Wheel surface: high-quality elastic rubber Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 150mm Wheel Width 50mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 115 x 100mm **Bolt Hole Spacing** 85 x 70mm Plate Hole 20 x 11mm Offset 35mm Swivel Interference 220mm Overall Height 190mm **Swivel Radius** 110mm

80±5° Shore A Hardness Of Tread

Load Capacity (Dynamic) 250kgs Load Capacity (Static) 375kgs

Temperature -20°C to +120°C

Fork Type Swivel Caster With Side Brake

N/A Stainless N/A **Electrical Conductivity** Anti-Static N/A Weight 3.0kgs ISO22883 Standard


Advantages at a glance

Rolling Resistance


Operating Noise

Floor Surface Preservation • • • • •

Dimensions

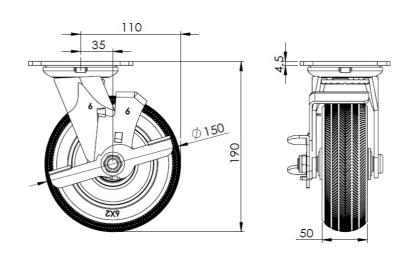

Mounting

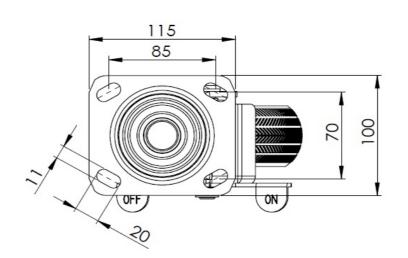

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.